

REPORT ON CENSUS SURVEY OF WATER BODIES

WEST BENGAL





QUALITY COUNCIL[®]
OF INDIA

Creating an Ecosystem for Quality



MR. ADIL ZAINULBHAI

Chairman,
Quality Council of India

The Ganga is a conduit for spirituality and faith for the people of India. To preserve and rejuvenate this sacred entity, the National Mission for Clean Ganga (NMCG) was instituted by the Ministry of Jal Shakti, and it has been an honour for QCI to collaborate with the Ministry for the mission.

Given the severe inequality of access to clean drinking water, which disproportionately impacts India's most vulnerable and marginalised communities, the mandate entrusted to the NMCG has become ever more important.

With India's ponds, reservoirs and other water bodies drying up, the Government of India highlighted the need for an accurate data on the number of water bodies existing in the villages within the Ganga basin. QCI took up the responsibility to address this critical gap along with the NMCG. This led us to undertake the Census Survey of Water Bodies.

Through this project, we made sure to collect most accurate data throughout the assessment, which lasted 140 days. A team of 41 assessors evaluated a total of 2,569 villages and mapped 1,100 water bodies in the Ganga basin, through which we derived 23,100 data points.

Owing to the norms of COVID-19 pandemic, we made sure that our processes were digitalised to ensure maximum coverage. This led us to collect geo-tagged picture-based

evidence with approximately 1,49,346 pictures received.

Our past experiences in working with the government ministries have indicated that an in-depth study of data unveils useful information and provides a greater insight into any issues that exist. Hence, this project's highlight was "Drone-based assessment". Through this, water bodies were geo-mapped to calculate certain parameters like size, depth and circumference of the water bodies within the Ganga basin present in four states namely, Uttar Pradesh, Bihar, Uttarakhand and Jharkhand.

Due to geo-mapping and tagging, the Ministry can now track the water bodies across the Ganga districts through a unique identity given to them. This makes each water body accessible to districts so that they can take necessary measures at village level.

This resulted in an impressive methodology, making the assessment more holistic as well as accurate. Also, it was made sure that the best practices were paid attention to, thoroughly.

I would like to congratulate all for putting their best foot forward in preserving this sacred symbol. Let's keep our collective efforts of working on this cause of keeping the water bodies safe and clean. Remember, this is just one step of making India healthier, brighter and better each day. Jai Hind!



DR. RAVI P. SINGH

Secretary General,
Quality Council of India

Ganga is a symbol of faith, culture and hope for the people of India as well as a major source of irrigation, agriculture, employment and electricity across the nation. Keeping the social, religious and economic aspects of the river in view, the National Mission for Clean Ganga (NMCG) was launched by the Ministry of Jal Shakti. It is a delight to note that the Ministry entrusted Quality Council of India with the responsibility of conducting its detailed study of the inland water bodies situated in villages of five states – Uttar Pradesh, Bihar, Uttarakhand, Jharkhand and West Bengal.

When we speak about conservation and preservation of water resources in developing nations, we make sure there are positive steps being implemented for the development of water bodies and, in turn, betterment of local communities and shelters depending on them. While conducting the study, it was brought to our notice that many villages lacked ecosystem benefits from the water bodies due to its inaccessibility and contamination. It was imperative for us to conduct this study as undertaking the Census not only highlighted the underlying importance of water resources and conservation of clean drinking water but also provided a real chance at improving the lives of several Indian communities relying on the river Ganga for livelihood in a tangible way.


While conducting the survey, QCI faced several challenges. Be it the COVID-19 pandemic or the massive landslides and floods in Chamoli district of Uttarakhand – these led to a delay in the beginning of the assessment process. The inaccessibility to

several villages in many states stood as another major challenge.

However, with great support provided to the team by the Ministry. The team tackled all the issues very mindfully. Several inaccessible villages in many states were later covered with the help and support of the locals. We also formed a special group that visited the villages of Chamoli for assessment of water bodies considering the severity of the situation.

Today, it is a pleasure to announce that a team of 41 assessors engaged in the functioning of this project, including conducting the surveys, analysing the gathered data and recommending remediation for conservation, beautification and preservation of the water bodies. We could gather approximately 23,100 data points over the course of 140 days of rigorous research and assessment, covering 2,569 villages and mapping 1,100 water bodies in Ganga basin. The on-ground assessment methodology was framed in a way that it brought the real picture of water bodies to our notice via assessors. This is how we recommended the best remedial measures for the revival/replenishment of water bodies according to their condition.

I would like to thank the Ministry for providing us with enough resources and assistance to work for an initiative of great national importance and development. QCI would like to extend its support in further times for such initiatives as well. We believe that when India's water bodies will be clean, its communities will shine even brighter!

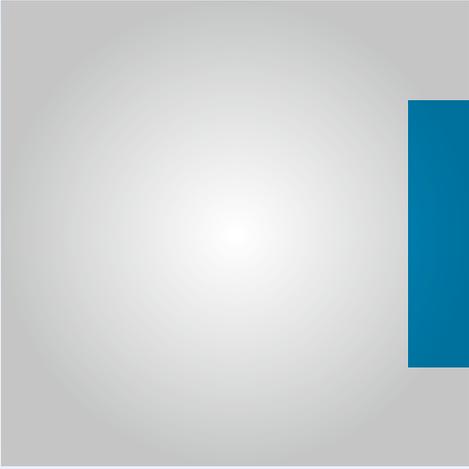

Dummy Text


Dummy Text

Contents

GLOSSARY	1
ABBREVIATIONS	5
1 EXECUTIVE SUMMARY	6
2 RESEARCH METHODOLOGY	8
3 PROJECT CHALLENGES	20
4 ASSESSMENT OVERVIEW: STATE AND DISTRICT	21
4.1 WEST BENGAL	21
4.1.1 Introduction	21
4.1.2 Scorecard: West Bengal	22
4.1.2.1 District-wise scores and descriptors	22
4.1.2.2 Graphical representation of District-wise score of West Bengal	23
4.1.2.3 Indicator-wise scores of West Bengal	24
4.1.2.4 Performance based descriptors of West Bengal	25
4.1.3 Key findings	26
4.1.3.1 Categorization of water bodies (Healthy/Water hyacinth/Eutrophied/Dried up)	27
4.1.3.2 Settlements under Catchment area	27
4.1.3.3 Drainage	28
4.1.3.4 Correlation	29
4.1.3.5 Solid waste found around/on the surface of water bodies	29
4.1.3.6 Community toilet/Public toilet management near water bodies	30
4.1.3.7 Open Defecation (Animal dung/Human faecal matter) found	31
4.1.3.8 Turbidity assessment (Water quality)	32
4.1.3.9 Additional indicators	32
4.1.4 District Overview: Report card and Scorecard	34
4.1.4.1 District Report: Purba Bardhaman	34
4.1.4.2 District Report: Nadia	42
4.1.4.3 District Report: South 24 Paraganas	50
4.1.4.4 District Report: Malda	59
A) ANNEXURE DETAILS	67
a. DETAILED SCORING TOOLKIT	67
b. STANDARD OPERATING PROCEDURE FOR DRONE ASSESSMENT (AERIAL SURVEY)	72

Figure Index

Figure 2.1: Surveyed Ganga states	9
Figure 2.2: Project Methodology	9
Figure 4.1: District-wise configuration of water bodies	22
Figure 4.2: District-wise scores of West Bengal	23
Figure 4.3: Indicator-wise comparison of National and State scores	24
Figure 4.4: Performance based descriptors of West Bengal	25
Figure 4.5: Key finding of water bodies found in West Bengal	26
Figure 4.6: Categorization of water bodies	27
Figure 4.7: Settlement near water bodies	27
Figure 4.8: Settlement near water bodies (District-wise)	28
Figure 4.9: Type of Settlement (District-wise)	28
Figure 4.10: Wastewater drainage near water bodies	28
Figure 4.11: Wastewater drainage near water bodies (District-wise)	29
Figure 4.12: Drainage	29
Figure 4.13: Waste around/on the surface of water bodies	30
Figure 4.14: Waste around/on the surface of water bodies (District-wise)	30
Figure 4.15: CT/PT around water bodies	30
Figure 4.16: CT/PT around water bodies (District-wise)	31
Figure 4.17: Open Defecation (Animal dung/Human faecal matter)	31
Figure 4.18: Open Defecation: Animal dung/Human faecal matter (District-wise)	31
Figure 4.19: Turbidity status of water bodies	32
Figure 4.20: Additional indicators assessed during the survey	32
Figure 4.21: Count of villages in Purba Bardhaman with water bodies	34
Figure 4.22: Categorization of water bodies in Purba Bardhaman	35
Figure 4.23: Turbidity in water bodies of Purba Bardhaman	35
Figure 4.24: Settlement near water bodies in Purba Bardhaman	35
Figure 4.25: Type of Settlement around water bodies in Purba Bardhaman	35
Figure 4.26: Wastewater drainage in and around water bodies in Purba Bardhaman	36
Figure 4.27: Solid waste inside and around water body in Purba Bardhaman	36
Figure 4.28: Block-wise score of Purba Bardhaman	37
Figure 4.29: Indicator-wise scores of Purba Bardhaman	38
Figure 4.30: Cleanliness index of Purba Bardhaman	39
Figure 4.31: Count of villages in Nadia with water bodies	42
Figure 4.32: Categorization of water bodies in Nadia	42
Figure 4.33: Turbidity in water bodies of Nadia	43
Figure 4.34: Settlement near water bodies in Nadia	43
Figure 4.35: Type of Settlement around water bodies in Nadia	44
Figure 4.36: Wastewater drainage in and around water bodies in Nadia	44
Figure 4.37: Solid waste inside and around water body in Nadia	44
Figure 4.38: Block-wise score of Nadia	45
Figure 4.39: Indicator-wise scores of Nadia	46
Figure 4.40: Cleanliness index of Nadia	47
Figure 4.41: Count of villages in South 24 Paraganas with water bodies	50
Figure 4.42: Categorization of water bodies in South 24 Paraganas	50
Figure 4.43: Turbidity in water bodies of South 24 Paraganas	51
Figure 4.44: Settlement near water bodies in South 24 Paraganas	51
Figure 4.45: Type of Settlement around water bodies in South 24 Paraganas	52
Figure 4.46: Wastewater drainage in and around water bodies in South 24 Paraganas	52
Figure 4.47: Solid waste inside and around water body in South 24 Paraganas	53
Figure 4.48: Block-wise score of South 24 Paraganas	54
Figure 4.49: Indicator-wise scores of South 24 Paraganas	55
Figure 4.50: Cleanliness index of South 24 Paraganas	56
Figure 4.51: Count of villages in Malda with water bodies	59

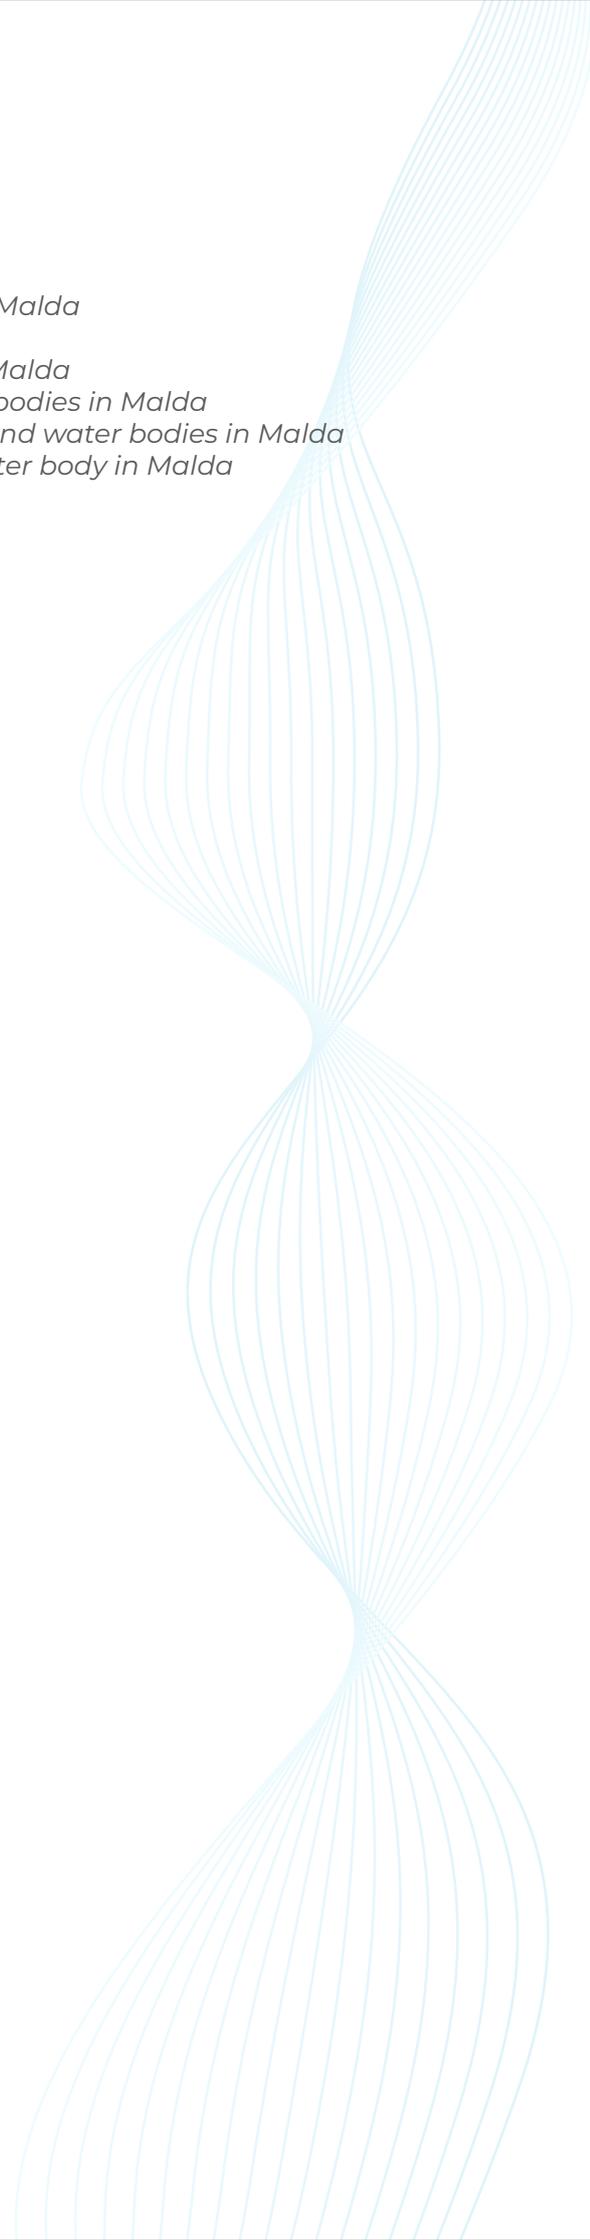

<i>Figure 4.52: Categorization of water bodies in Malda</i>	59
<i>Figure 4.53: Turbidity in water bodies of Malda</i>	60
<i>Figure 4.54: Settlement near water bodies in Malda</i>	60
<i>Figure 4.55: Type of Settlement around water bodies in Malda</i>	61
<i>Figure 4.56: Wastewater drainage in and around water bodies in Malda</i>	61
<i>Figure 4.57: Solid waste inside and around water body in Malda</i>	61
<i>Figure 4.58: Block-wise score of Malda</i>	62
<i>Figure 4.59: Indicator-wise scores of Malda</i>	63
<i>Figure 4.60: Cleanliness index of Malda</i>	64

Table Index

<i>Table 1: Survey figures</i>	6
<i>Table 2: Sample size of the survey</i>	8
<i>Table 3: Summary of Scoring Toolkit</i>	11
<i>Table 4: Water body Cleanliness Index</i>	11
<i>Table 5: Intervention Methodology</i>	12
<i>Table 6: District-wise configuration table of West Bengal</i>	21
<i>Table 7: Blocks of West Bengal with no water bodies</i>	22
<i>Table 8: District-wise scores and descriptors</i>	23
<i>Table 9: Ranking of Blocks in Purba Bardhaman based on scores</i>	37
<i>Table 10: Ranking of Blocks in Nadia based on scores</i>	45
<i>Table 11: Ranking of Blocks in South 24 Paraganas based on scores</i>	54
<i>Table 12: Ranking of Blocks in Malda based on scores</i>	62

Glossary

Aesthetic Enhancement	Park, benches, floral beautification, footbridge, structure/statues around the water body region.
Biological Remediation	Use of microbes or plants such as canna, Cyprus or any suitable plant and (Another method: Geo-Netting) to clean up contaminated water body, soil and groundwater. It is recommended in order to keep Water body peripheral ecosystem robust.
Blockage mapping	Mapping of roads and drains in around the water body blocking the drainage flow
Catchment Area	An area of land where water collects when it rains finding its way into streams and down into the soil, eventually feeding the water body.
Catchment Yield	The total quantity of surface water that can be expected in a given period from a stream at the outlet of its catchment is known as yield of the catchment in that period ¹ .
Contour Mapping	Delineation of any property in map form by constructing lines of equal values of that property from available data points ² .
Defunct Borewells	Borewells that are no longer in purpose due to reduced groundwater levels.
Domestic Wastewater Secondary Treatment Plant	Secondary treatment is the removal of biodegradable organic matter (in solution or suspension) from wastewater through a series of chamber consisting of Sand charcoal or Activated carbon and Coarse gravel at the edge of the water body entrance. The aim is to achieve a certain degree of effluent quality of wastewater. This is achieved with physical phase separation to remove settleable solids followed by a biological process to remove dissolved and suspended organic compounds.
Drainage Basin Alteration (Contour Bunding)	Geographical method such as slope modification, contour bunding, construction of trenches, terracing for protection against soil/wind erosion and restoring water quality and quantity.
Drainage runoff	Flow of wastewater into the water body
Dredging	Process of removal of silt and other material deposited at the bottom of the water body as a result of drainage or run off.

¹ www.theijes.com

² [Contour mapping | geography | Britannica](#)

Eutrophication	Gradual increase in the concentration of phosphorus, nitrogen, and other plant nutrients causing structural changes to the aquatic ecosystem such as: increased production of algae and aquatic plants, depletion of fish species, general deterioration of water quality and other effects that reduce and preclude use
Green Buffer zone	Area that is created or demarcated to enhance the protection of a specific sensitive conservation area, often peripheral to it from negative external pressures. These areas in the context of water body will act as a filter on nutrients in the underground water and surface water.
Leachate	Toxic liquid that is formed from the breakdown of wastes at the landfill area that percolate into the ground.
Non-Point Source Pollution	<p>Nonpoint source pollution refers to water pollution from diffuse sources. It negatively influences water bodies from sources such as polluted runoff from agricultural areas draining into a water body.</p> <p>Nonpoint source pollution may derive from many different sources with no specific solution able to rectify the problem, making it difficult to regulate. It is therefore difficult to control because it comes from everyday activities, such as fertilizing a lawn, using a pesticide, or constructing a road or building.</p>
Open Defecation	Human practice of excreting in the open in fields, bushes, forests, streets, canals, waterways, ditches, or other open areas.
Orthomosaic Images	A geometrically correct aerial image that is composed of many individual overlapping still images that are stitched together ³ .
Oxygen Saturation levels	Oxygen saturation is a ratio of the concentration of "dissolved oxygen", to the maximum amount of oxygen that will dissolve in that water body, at the temperature and pressure, which constitute stable equilibrium conditions.
Riparian Vegetation	An interface area between land and water body that slows and dissipates floodwater, prevent erosion and ensures high water quality of water body.
Settlement/ Encroachment	Development on waterbodies and buffers areas around them encompassing removal of vegetation, or an alteration of topography, consequently impacting the functions and values in such natural areas such as a decline in water quality, loss of habitat (both aquatic and terrestrial), disruption of equilibrium (or naturally stable) conditions, loss of flood attenuation, or reduction of ecological processes.

³ Orthomosaic Map

Silt Management	Measures adopted to trap the silt before entering the water body by digging trenches in the catchment area.
Sludge Management	Processes and technologies that
Total Dissolved Solids	Total dissolved solids (TDS) is the term used to describe the inorganic salts and small amounts of organic matter present in solution in water. The principal constituents are usually calcium, magnesium, sodium, and potassium cations and carbonate, hydrogen carbonate, chloride, sulfate, and nitrate anions.
Total Suspended Solids	Total Suspended Solids (TSS) refers to any particles that are suspended in the water column. These particles can include silt, algae, sediment, and other solids floating in the water (both organic and inorganic). These particles are defined as being large enough to not pass through the filter (through the filtration process) used to separate them from the water. Suspended solids absorb heat from sunlight and as a result, the water temperature increases resulting in a deprivation of dissolved oxygen in the water, which can be disastrous to aquatic life if levels are too high. TSS can be measured in ppm, mg/L, g/L and %.
Turbidity	Turbidity is the amount of cloudiness in the water varying from a river full of mud and silt where it would be impossible to see through the water (high turbidity), to a spring water which appears to be completely clear (low turbidity).
Waste weir	A waste weir is a slatted gate on each canal level or pound, to remove excess water and to drain the water for repairs. This differs for a reservoir, for which a waste weir is another name for a spillway, i.e. not having the boards to adjust the water height nor the paddles to drain all the excess water.
Wastewater drainage	Used water from any combination of domestic, industrial, commercial or agricultural activities, surface runoff, and any sewer inflow or sewer infiltration.
Water body – Natural and Artificial	Natural water body means a pond, spring or stream that was historically present in a natural state but may have been physically altered over time. Artificial water bodies are man-made water bodies such as Kunds, Irrigational reservoir and a pond constructed for occupational use.
Water Body Peripheral Ecosystem	Geographic area or near the periphery of a water body where plants, animals, and other organisms, as well as weather and landscape, work together to make the ecosystem robust.

³ Orthomosaic Map

⁴ WHO

**Water Hyacinth/
Duckweed**

Water hyacinth is a free-floating perennial invasive aquatic plant, highly popular due to its beauty and ability to absorb excess nutrients from the pond in order to control and conserve environmental condition. It can absorb excess minerals and inorganic substance from wastewater entering into a water body. Duckweeds are the smallest flowering plants known which has a property to purify water. It also maintains the habitat by providing enough shade to keep the growth of oxygen-robbing algae down.



Abbreviations

NMCG	National Mission for Clean Ganga
QCI	Quality Council of India
CSWB	Census Survey of Water Bodies
CAPI	Computer-Assisted Personal Interviews
DGCA	Directorate General of Civil Aviation
DM	District Magistrate
ADM	Additional District Magistrate
SDM	Sub-Divisional Magistrate
DFO	District Forest Officer
DPRO	District Panchayati Raj Officer
DO	Direct Observation
OD/OU	Open Defecation/Open Urination
DM	Depth Measurement
KII	Key Informant Interview
WBD	Water Body Details/Documents
CF	Citizen Feedback
CT/PT	Community Toilet/Public Toilet
SLWM	Solid Liquid Waste Management
SONAR	Sound Navigation Ranging
NABCB	National Accreditation Board of Certification Authorities
IB	Inspection Bodies
DTM	Digital Terrain Model
DSM	Digital Surface Model
GVP	Garbage Vulnerable Points
SWM	Solid Waste Management

1. EXECUTIVE SUMMARY

'Census Survey of Water Bodies (CSWB) in Ganga basin' under 'Namami Gange' encapsulated 100 per cent mapping of the water bodies across 31 districts (3,189 villages) spread across Uttar Pradesh, Uttarakhand, West Bengal, Jharkhand and West Bengal. With challenges abound, one of the major ones being geo-tagging of the water bodies, the National Mission for Clean Ganga (NMCG) entrusted the Quality Council of India (QCI) for assisting it with the quest of assessing all water bodies and create a baseline data for all the 31⁶ Ganga districts.

The three main objectives of this study were to (a) map the water bodies present in villages, (b) assign a unique code to the water bodies for identification and (c) formulate Water body Cleanliness Index. The identified thrust area includes all water bodies in the Ganga district, which are either dried-up or have water less than their full water holding capacity. This

survey includes two major components:

- Identification & Mapping: QCI leveraged the network of National Accreditation Board for Certification Bodies (NABCB) accredited inspection bodies in conducting the survey through Computer-Assisted Personal Interviews (CAPI). It involved 2 sub-components (a) Key Informant Interview, and (b) Direct Observation.
- Estimation of water holding capacity: In order to acquire size, depth and volume of the water bodies the aerial survey using drones and floating depth measurement device were used. The aerial survey provided precise physical properties of the water bodies taking into account the area, periphery, vegetation, settlement and additionally, depth of dried-up water bodies from orthomosaic images and contour maps.

The total number of villages allocated and the total number of water bodies found are mentioned in the table below:

Description	Uttar Pradesh	Jharkhand	Bihar	Uttarakhand	West Bengal	Total
Total number of villages allocated	691	66	220	222	1990	3189
Total number of water bodies found	329	56	113	44	558	1100

Table 1: Survey figures

⁶ Districts covered under 'Jal Shakti Abhiyan' were excluded from the survey, which brought down the number of districts from 52 to 31 in five Ganga states. Two districts in West Bengal: Howrah and Murshidabad were not covered, as official permission were not granted for the survey of the waterbodies in these districts. Several villages in Malda district did not exist in their respective Gram Panchayats. This concomitantly reduced the total number of villages actually assessed during the survey.

Through the study, it is concluded that the water bodies in villages of Uttarakhand tops the chart among the five states with an average score of 200.63. While, West Bengal with an average score of 164.43 ranked last.

The study is followed with the creation of dashboard for data visualization and pictorial representation of all the five states including the district, block and village level data, which includes layered maps and static data of the water bodies. The CSWB not only provides a full database of water bodies but also provides appropriate measures and recommendations for rejuvenation of the water bodies present in the villages of five Ganga states.

The geospatial data of all the water bodies in selected 5 states has been stored and displayed in the dashboard which has been collected and processed using a drone and on-field assessments. The data has been visualized in a flow such as National- State- District- Block- Village- Water body with assessment photographs.

Following data will be visualized in the dashboard:

1. Category of the water body
2. Scores of the water body
3. Water body Cleanliness Index
4. Water body-wise codes
5. Volumetric assessment⁷ data (Water holding capacity)
6. Satellite/Map view of the water bodies

This data will be accessed by district administration in each of the 5 states. The district officials can view the recommendations and undertake action based on the data in the portal and thereafter upload the 'Action Taken' status data, which includes few text fields and photographs, against each waterbody.

⁷. It was a cumbersome process for our team to get approval for flying a drone in West Bengal. Our team went on-field to get the required permissions from the respective District offices but drone approval could not be obtained due to lack of cooperation.

2. RESEARCH METHODOLOGY

The deliverables of the assessment were structured in two phases, as the 'On-field assessment' followed by the 'Drone assessment'.

The On-field assessment assisted in determining current health of the water bodies and helped in understanding the socio-economic values that these water bodies hold within the local communities.

The second phase of assessment was

achieved through an Ariel survey by using drone technology that demarks the physical properties and surrounding structures of a water body. Properties of a water body like its peripheral, area, volume/depth and surrounding terrains were easily fetched with the help of drones without compromising on the quality and accuracy. The aerial survey was conducted as per the approval by NMCG and in compliance with the DGCA guidelines.

The following table depicts the total number of Districts, Blocks, Gram Panchayats and Villages covered under the CSWB assessment in five Ganga States:

State	District	Block	Gram Panchayat	Villages
Bihar	6	28	119	219
Jharkhand	1	6	26	66
Uttar Pradesh	11	50	435	689
Uttarakhand	7	30	130	222
West Bengal	4	28	128	1373
Total	29	142	838	2569

Table 2: Sample size of the survey

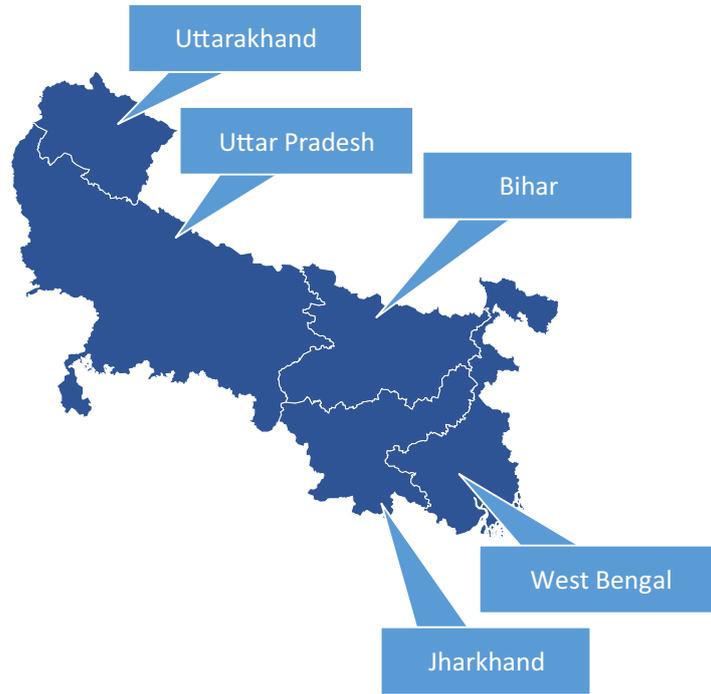


Figure 2.1.: Surveyed Ganga states

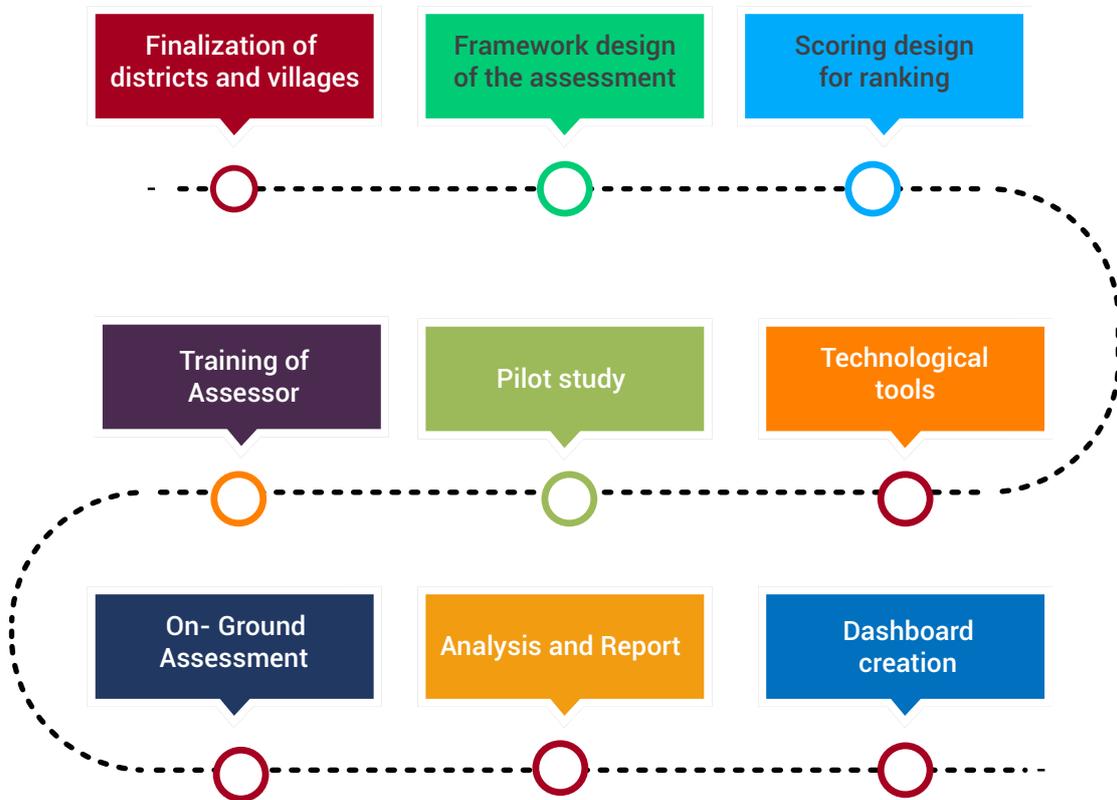


Figure 2.2.: Project Methodology

Step 1: Finalization of District and Villages for assessment

Initially, QCI was allocated 31 districts in 5 Ganga states for the assessment but due to various limitations⁸ only 29 districts could be covered.

Step 2: Framework design of the assessment

Process followed for the development of 'Assessment Framework':

1. In order to begin with the survey of the water bodies, all probable stakeholders were identified to derive a holistic view from the assessment. Our stakeholders included DMs, ADMs, SDMs, DFOs, DPROs, Pradhans, Tehsildar, Patwari, Lekhpal and village locals at Village and Gram Panchayat level and District levels.
2. Detailed questionnaires were prepared in consultation with NMCG. The questionnaires consisted the following sections-
 - a. **Direct Observation (DO):** The on-field assessors provided a status and health of the water bodies as perceived on the following parameters of Condition/ State, Infrastructure, Aesthetics, Quality, Solid Waste, Wastewater, and OD/OU.
 - b. **Depth Measurement (DM):** Average depth of a water body from all cross-sectional areas were found out by subdividing the water bodies into 4 checkpoints. Depending on the size of the water body either 4 or 6 checkpoints were defined and 4 throws were made from each cross-

sectional area using depth measurement meter. Over all 16-24 repetitive observations were made in order to ensure data accuracy of average depth.

- c. **Key Informant Interviews (KII) and Citizen Feedback (CF):** To validate the information received during on-ground assessment of water bodies, the authorized government official at the village, panchayat or at the block level issued an undertaking. Verbatims were taken from the identified stakeholders as a double confirmation about availability and actual status of water bodies along with the problems that had been addressed by the villagers using CAPI.
- d. **Water Bodies Details/ Documents (WBD):** Reviewed the documents (subject to availability) received from the village officials on utility benefits gained by locals, cleaning, spread-out area, storage capacity and various other critical information about water bodies.

Step 3: Scoring design for ranking of States, Districts and Blocks

On-ground assessment of the water bodies was conducted on the basis of various key indicators such as Condition/State, Infrastructure, Aesthetics, Quality, Solid waste, wastewater management, and OD/OU. A weightage against each of these was evaluated as a part of scoring. These key indicators formed the 'Water body Cleanliness Index' based on which the Ganga districts and their respective blocks are ranked.

⁸. Refer 'Project Challenges'

Category	Sub-category	Question Wise Marks	Total	Section Total
Water Body Cleanliness Index	Condition/ State	Adequacy	10	40
		Settlement	20	
		Septic tanks	10	
	Infrastructure	Condition of fencing	20	50
		Outlet	10	
		Road connected to water body	10	
		CT/PT	10	
	Aesthetics	Aesthetic enhancement	10	10
	Quality	Turbidity	10	50
		Eutrophication	20	
		Foam	20	
	Solid Waste	Waste Inside	20	80
		Leachate	20	
		Waste Around	20	
		Dustbins	10	
		Flies	10	
Wastewater	Washing around water body	20	50	
	Drainage present	30		
OD/OU	Faecal matter around water body	20	20	

Table 3: Summary of Scoring Toolkit

Descriptors	Intervals	Maximum Range	Minimum Range
Best	300.00-240.00	300.00	240.00
Good	239.99-180.00	239.99	180.00
Average	179.99-120.00	179.99	120.00
Poor	119.99-60.00	119.99	60.00
Very Poor	59.99-0.00	59.99	0.00

Table 4: Water body Cleanliness Index

Intervention Methodology

Type Of Water Body	Particulars	Sub - Parameter	Recommendation	Intervention
Eutrophication	Physical infrastructure	Fencing	Bio fencing required	High
			Wooden/vinyl required	Medium
			Barbed wires/small-metal/cemented	Low
		Road	-	-
			Drains and roads are blocking the flow of Water Bodies	Medium
			Periphery of water body	Low
	Drain Mapping	Drainage	Black water flow	High
			Grey water flow	Medium
			Other water or no drain found	Low
		Bar screen	Drainage pipes directly connected to water body	High
			No screen/net-mesh/grill found	Medium
			-	Low
	Catchment area	Agriculture fields/Habitat	Agriculture fields or habitat found	High
			-	-
			Both agriculture fields and habitat not found	Low
		SLWM	Solid waste found on the surface of water body	High
			Solid waste present around the water body	Medium
			No solid waste found	Low
		SLWM (Animal waste)	Cattle waste/dung found	High
			-	-
			-	-
			-	-
	Inner structure	Dredging	Needs to be done for 04 metre (approx.)	High
			-	-
			-	-
		Pal/berms	Not found for big size water body	High
			Not found for small size water body	Medium
Found on the circumference of water body			Low	
Inlet		Not present	High	
		Present but needs the required shape	Medium	
		-	-	

Type Of Water Body	Particulars	Sub - Parameter	Recommendation	Intervention
	Sustainability plan	Biological remediation	Designing of floating treatment wetland	High
			-	-
			-	-
		Filtration	Rain/storm water mapping and cleaning process	High
			-	-
			-	-
		Rotation of cleaning	Preferably each year	High
			-	-
			Happening within 6 months	Low
		Eutrophication prevention	Removing the Eutrophied water and cleaning the water bed	High
			-	-
			-	-
		Utility benefits	No data provided	High
			-	-
			-	-
Healthy	Physical infrastructure	Fencing	-	-
			Bio fencing required	Medium
			Wooden/vinyl or Barbed wires/small-metal/cemented	Low
		Road	-	-
			found on the circumference of water body	Medium
			If drains and roads are blocking the flow of water body	Low
	Drain Mapping	Drainage	-	-
			Black water flow	Medium
			Grey water or Other water or no drain found	Low
		Bar screen	-	-
Drainage pipes directly connected to water body	Medium			
-	-	-		

Type Of Water Body	Particulars	Sub - Parameter	Recommendation	Intervention	
Healthy	Catchment area	Agriculture fields/Habitat	-	-	
			Agriculture fields or habitat found	Medium	
			Both agriculture fields and habitat not found	Low	
		SLWM	-	-	
			Solid waste found on the surface of water body	Medium	
			Solid waste present around the water body or No solid waste found	Low	
		SLWM (Animal waste)	-	-	
			Cattle waste/dung found	Medium	
		Inner structure	Dredging	-	-
				-	-
	Clearing the mud/silt from the bottom of the water body			Low	
	Pal/berms		-	-	
			Not found for big size water body	Medium	
			Not found for small size water body or found on the circumference of water body	Low	
	Inlet		-	-	
			Not present	Medium	
			Present but needs the required shape	Low	
	Sustainability plan		Biological remediation	-	-
		-		-	
		Preventing from Non-Point source pollution		Low	
		Filtration	-	-	
			-	-	
			Rain/storm water mapping and cleaning process	Low	
		Rotation of cleaning	-	-	
Preferably each year			Medium		
Happening within 6 months	Low				

Type Of Water Body	Particulars	Sub - Parameter	Recommendation	Intervention
		Eutrophication prevention	-	-
			-	-
			Not Eutrophied	Low
		Utility benefits	-	-
			No data provided	Medium
			-	-
Water Hyacinth	Physical infrastructure	Fencing	Bio fencing required	High
			Wooden/vinyl required	Medium
			Barbed wires/small-metal/cemented	Low
		Road	-	-
			-	-
			Found on the circumference of water body or If drains and roads are blocking the flow of water body or No road found	Low
	Drain Mapping	Drainage	Black water flow	High
			Grey water flow	Medium
			Other water or no drain found	Low
		Bar screen	Drainage pipes direct connect to water body	High
			No screen/net-mesh/grill found	Medium
			-	-
	Catchment area	Agriculture fields/Habitat	Agriculture fields or habitat found	High
			Both agriculture fields and habitat not found	Medium
			-	-
		SLWM	Solid waste found on the surface of water body	High
			Solid waste present around the water body	Medium
			No solid waste found	Low
			Cattle waste/dung found	High
		SLWM (Animal waste)	-	-
			-	-
			-	-
	Inner structure	Dredging	Needs to be done for 04 metre (approx.)	High
			-	-
-			-	

Type Of Water Body	Particulars	Sub - Parameter	Recommendation	Intervention	
		Pal/berms	Not found for big size water body	High	
			Not found for small size water body	Medium	
			Found on the circumference of water body	Low	
		Inlet	Not present	High	
			Present but needs the required shape	Medium	
			-	-	
		Sustainability plan	Biological remediation	Designing of floating treatment wetland	High
				-	-
				-	-
	Filtration		Rain/storm water mapping and cleaning process	High	
			-	-	
			-	-	
	Rotation of cleaning		Preferably each year	High	
			Happening within 6 months	Medium	
			-	-	
	Eutrophication prevention		-	-	
			Removing the hyacinth by thrashing and cleaning the water bed	Medium	
			-	-	
	Utility benefits	No data provided	High		
		-	-		
		-	-		
Dried up	Physical infrastructure	Fencing	Bio fencing required	High	
			Wooden/vinyl required	Medium	
			Barbed wires/small-metal/cemented	Low	
		Road	Found on the circumference of water body	High	
			If drains and roads are blocking the flow of water body	Medium	
			No road found	Low	
	Drain Mapping	Drainage	Black water flow	High	
			Grey water flow	Medium	
			Other water or no drain found	Low	
		Bar screen	Drainage pipes direct connect to water body	High	
			No screen/net-mesh/grill found	Medium	
			Other water or no drain found	Low	

Type Of Water Body	Particulars	Sub - Parameter	Recommendation	Intervention	
	Catchment area	Agriculture fields/Habitat	Agriculture fields or habitat found	High	
			Both agriculture fields and habitat not found	Medium	
			-	-	
		SLWM	Solid waste found on the surface of water body	High	
				Solid waste present around the water body	Medium
				No solid waste found	Low
			SLWM (Animal waste)	Cattle waste/dung found	High
				-	-
		-	-		
		Inner structure	Dredging	Needs to be done for 04 metre (approx.)	High
	-			-	
	-			-	
	Pal/berms		Not found for big size water body	High	
			Not found for small size water body	Medium	
			Found on the circumference of water body	Low	
	Inlet		Not present	High	
			Present but needs the required shape	Medium	
			-	-	
	Sustainability plan		Biological remediation	-	-
		-		-	
		-		-	
		Filtration	Rain/storm water mapping and cleaning process	High	
			-	-	
			-	-	
		Rotation of cleaning	Preferably each year	High	
			Happening within 6 months	Medium	
			-	-	
		Eutrophication prevention	-	-	
			-	-	
			-	-	
Utility benefits		No data provided	High		
		-	-		
		-	-		

Table 5: Intervention Methodology

Step 4: Technology tools

1. **CAPI:** Hand-held devices were used for on-field assessment to capture the responses of the stakeholders based on the final questionnaires. All the evidences were geo-tagged with date and time stamp for real-time data quality check. Geo-tagged location facilitated the drone pilots in identifying water bodies for aerial survey.
2. **Depth measurement device:** A Floating device based on SONAR technology was used to capture the depth of water bodies for 'Volumetric assessment'. The Depth measurement device was a set of two devices: (a) Part flows on the surface of the waterbody and measures the depth of the waterbody through ultrasonic waves and (b) depth measurement meter, a hand-held device which displays the depth readings.
3. **Drone technology:** Drone technology was used to capture high- resolution images, final-scaled geo-positioned orthomosaic images with demarcations, and the contour maps. The drone is operated with a mobile device on a pre-planned path set by the pilot. It hovers over the water body to collect multiple geo-tagged points. Area (in acres) of water bodies were measured through GIS compatible drawing file. Shape files of roads, trees, buildings, farmlands were also produced to measure the distance between closest roads, vegetation or agricultural fields from the water body.

Step 5: Pilot Study

1. To understand the process of water body mapping and ascertaining the

framework of the project, a pilot study was conducted in Haridwar district of Uttarakhand and Amroha district of Uttar Pradesh wherein four villages from each district were chosen randomly.

2. Pilot studies for drone assessment were conducted in four villages of Chandauli district of Uttar Pradesh namely Diya, Nagwa, Papraul and Puracheta Dube to test the relevance and efficiency of the framework and survey tools. Corrective measures were taken based on the same before the final Drone assessment.


Step 6: Training of Assessor

National Accreditation Board of Certification Authorities (NABCB) certified Inspection Bodies (IBs) were selected based on their relevant experience in the field of assessment and scale of operations. Detailed classroom and field trainings for the assessors were conducted in Kolkata, West Bengal and Bhubaneswar, Odisha. Thereafter, the assessors were selected on the basis of a test and personal interview.

Step 7: On-ground assessment

The on-ground assessment was carried out in two stages: (a) The first stage involved capturing responses of all stakeholders through personal interviews and evaluation of the water bodies based on the questionnaires using CAPI and depth measurement using the floating device, and (b) In the second stage aerial survey was conducted.

The process of assessment is as below:

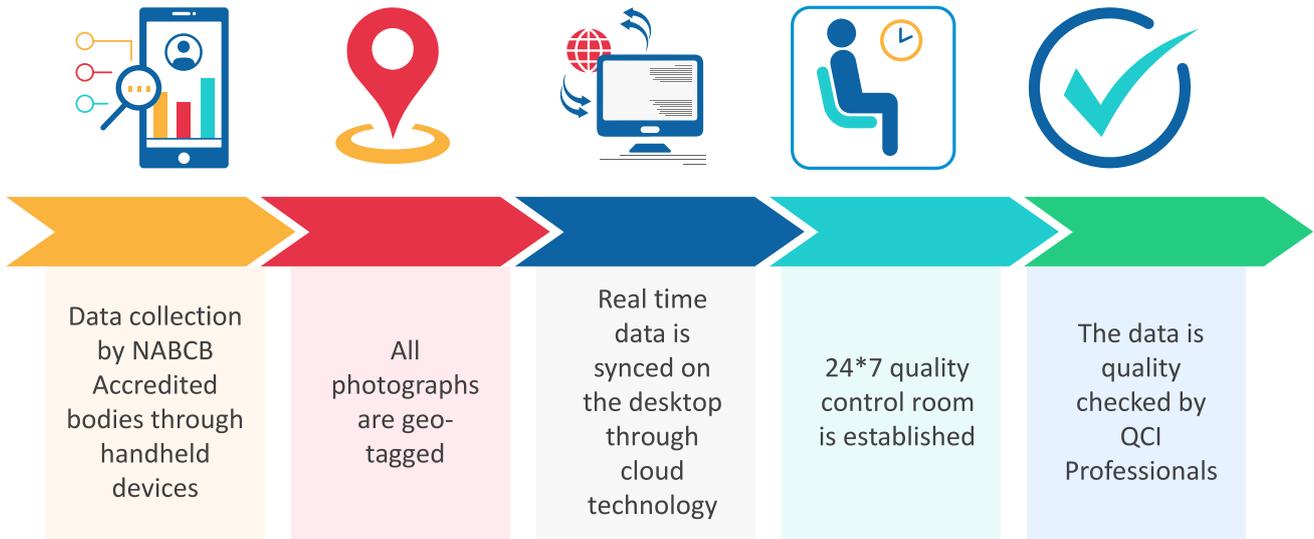

Data Monitoring and Control

A 24*7 war room was set up at Delhi office of QCI to monitor the daily progress, consistency and quality of the survey. The survey results were monitored on a real time basis and the queries of the field assessors was resolved promptly by the team through an 'Assessor help desk'.

The data collected by on field assessor underwent a thorough and rigorous three-layer quality checks:

- Level 1:** Trained assessor collects the data on-ground and uploaded it on a real time basis through mobile application
- Level 2:** Quality check coordinator (stationed at QCI headquarters) who is mapped to an assessor monitored the survey and validated the information received at the back end.
- Level 3:** A senior QCI team member at the control room re-evaluated the field data collected

Step 8: Analysis and Report

QCI leveraged the expertise of Indian Statistical Institute in analyzing and interpreting statistical data. Data analysis was carried out using software such as Excel or R.

Step 9: Dashboard creation

A dashboard has been created to display the pictorial data of the key findings of the water bodies in each Ganga basin district. Layered maps include Geo tagged feature, Orthomosaic Map, Contour Map, Ortho Feature map (Circumference, trees, farmlands, residential area), Shape file, Drawing file, DTM, and DSM. Each water body can be identified from their unique codes. The details of all the parameters assessed along with the scores and images of the water bodies could be fetched from the dashboard. Additionally, state of rejuvenation of the water body can also be found. The study has also listed down type of interventions and recommendations for each water body for their protection and rejuvenation which can also be referred from the dashboard.

3. PROJECT CHALLENGES

1. Official support:

Due to on-going COVID and other issues, few district authorities did not cooperate in providing the required permissions for on-ground assessment. Two districts of West Bengal: Howrah and Murshidabad were not covered, as official permission was not granted for the survey of the waterbodies in these districts.

2. Obstacles during Turbidity test and Depth Measurement:

The presence of muddy edges, dense bushes, and thick water hyacinth caused hindrances to collect physical parameters of the water body by the on-field assessors.

3. COVID-19 Pandemic:

Both the first and second wave had disrupted the on-field operations. Many district officials and key informants were reluctant in interacting with the assessors. Covid-19 also led to hike in drone service charges across the nation and non-availability of the desired standard of drones.

4. Natural Hindrances:

On-ground assessment was stopped due to Cyclone Yaas in West Bengal. Hence, the survey got delayed.

4. ASSESSMENT OVERVIEW: State And District

4.1 West Bengal

1.1.1 Introduction

A total of 1373 villages in 4 districts situated in Ganga basin were covered in the survey conducted in West Bengal. A total of 558 water bodies were found in 360 Ganga basin villages during the survey.

Below table depicts the bifurcation of total number of water bodies identified and mapped on the basis of Districts and in their subsequent Block-wise Villages:

District	Number of Blocks	Number of Villages with water bodies	Number of water bodies found
Malda	4	45	53
Nadia	8	45	89
Purba Bardhaman	6	29	66
South 24 Paraganas	10	241	350
Total	28	360	558

Table 6: District-wise configuration table of West Bengal

Only 26 per cent of the villages had water bodies present in them as compared to the total villages assessed in West Bengal.

District-wise percentage distribution of water bodies is shown in the graph below:

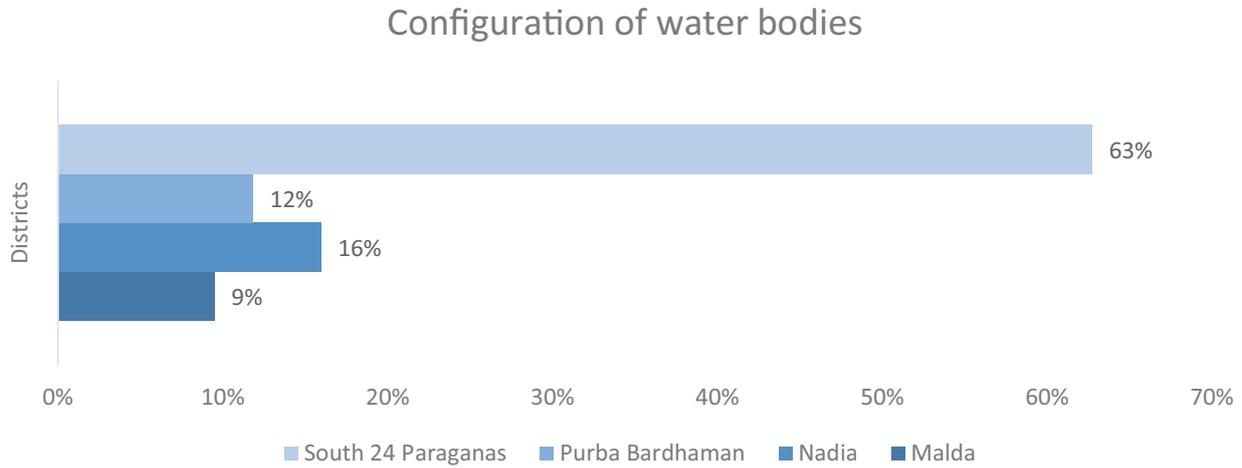


Figure 4.1: District-wise configuration of water bodies

As per the collected data, the Maximum percentage of water bodies were found in Bhagalpur, which accounted for 36 per cent (41). However, the minimum percentage of water bodies were found in Samastipur, which accounted for 4 per cent (5).

With a count of 77 villages, the Maximum number of villages were assessed in Bhagalpur district, wherein a total count of 41 water bodies were identified. On the other hand, with a count of 14, the least number of villages were assessed in Lakhisarai wherein, 16 water bodies were identified.

The following eight blocks in their respective Ganga districts did not have water bodies:

District Name	Block with No Water body
Nadia	Ranaghat-i
Purba bardhaman	Katwa-ii
Purba bardhaman	Ketugram-ii

Table 7: Blocks of West Bengal with no water bodies

4.1.2 Scorecard: West Bengal

4.1.2.1 District-wise scores and descriptors

Below table depicts a tabular representation of the scores acquired by each district of West Bengal along with performance descriptor and its rank:

State:West Bengal			
Rank	District	Score (300)	Descriptors
1	Purba Bardhaman	182.36	Good
2	Nadia	178.60	Average
3	South 24 Paraganas	178.05	Average
4	Malda	174.97	Average

Table 8: District-wise scores and descriptors

4.1.2.2 Graphical representation of District-wise score of West Bengal

Scores have been summarized on the basis of all the seven indicators mentioned in scoring methodology, which were considered as the key factors for evaluation of the water bodies. As per the evaluation, West Bengal stands with an average score of 178.5 out of 300.

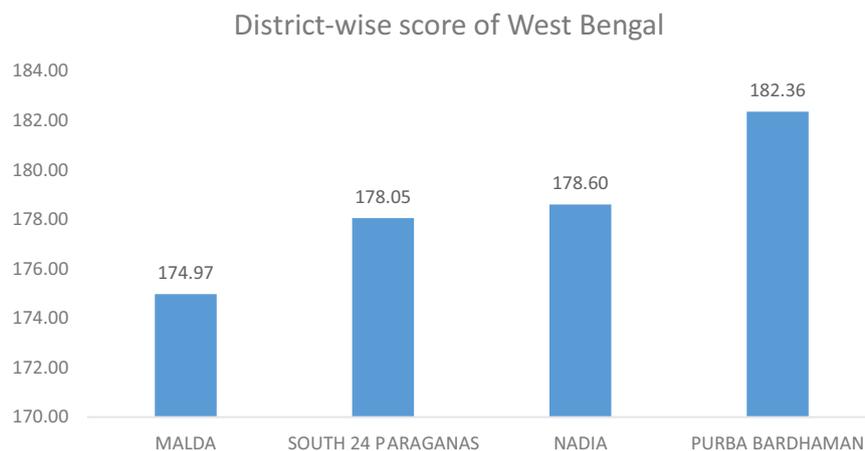


Figure 4.2: District-wise scores of West Bengal

The resultant score indicates an overall 'Average' performance by the State. Purba Bardhaman was found to be the best performing district with a score of 182.36. However, Malda with a score of 174.97, found to be the worst performing district of West Bengal.

4.1.2.3 Indicator-wise scores of West Bengal

The figure given below represents indicator-wise comparison of the State average and National average scores. Evaluation of scores and grades was done on the basis of seven key indicators mentioned in the graph below:

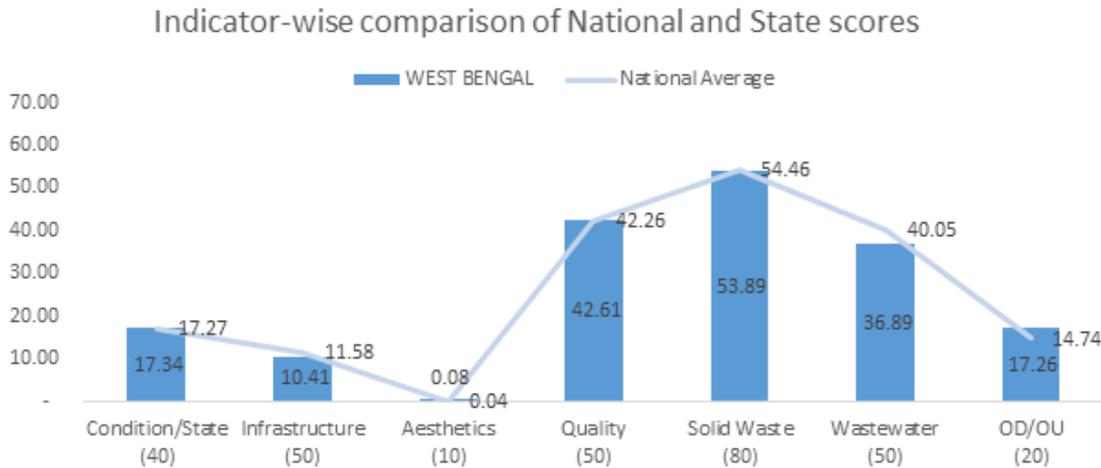


Figure 4.3: Indicator-wise comparison of National and State scores

- 1. Condition/state**, which plays a significant role in determining overall health a water body and the reason for its rejuvenation or depletion. Factors affecting the condition of water bodies are types of settlement and septic tanks present near them.
- 2. Infrastructure** signifies the physical structure of a water body, which includes the condition of fencing, road connectivity around the water body and outlet channel to ensure drain-out of overflow. This indicator plays a vital role in resolving the issue of water bodies being dried-up.
- 3. Aesthetics (Aesthetic enhancement)** includes beautification around the water bodies, which includes benches, bridges, religious architectures/idols, sheds, grass/gardening, etc.
- 4 Quality** as an indicator comprise of factors like turbidity status, eutrophication, and formation of foam, which comprehends the severity in terms of quality of water present in a water body.
- 5. Solid Waste** includes waste present around/on the surface of water bodies. It checks on factors like availability of the dustbins, flies over the Garbage Vulnerable Points (GVPs) and leachate coming out from it, which might directly contaminate a water body.
- 6. Wastewater** includes the status and type of drainage run-off and direct contamination of water body due to it.
- 7. OD/OU** indicator indicates the presence of the human faecal matter, animal dung and urination around water body. It acts as a major role behind the growth of algae and plants into the water body.

The line graphs depict indicator-wise National average of the survey and the bar graph represents the indicator wise scores of West Bengal.

- In terms of Condition/State, Aesthetics and Solid waste disposal West Bengal maintains the mean score corresponding to the National score.
- Whereas, in terms of Quality and OD/OU, score of West Bengal is better than the National score.
- However, in terms of, Infrastructure and Wastewater drainages, the state didn't perform well.

4.1.2.4 Performance based descriptors of West Bengal

Water bodies found in various districts of West Bengal were lying under different descriptors as per their performances. These descriptors are characterized by seven indicators for evaluation of water bodies, which denotes 'Water body Cleanliness Index'.

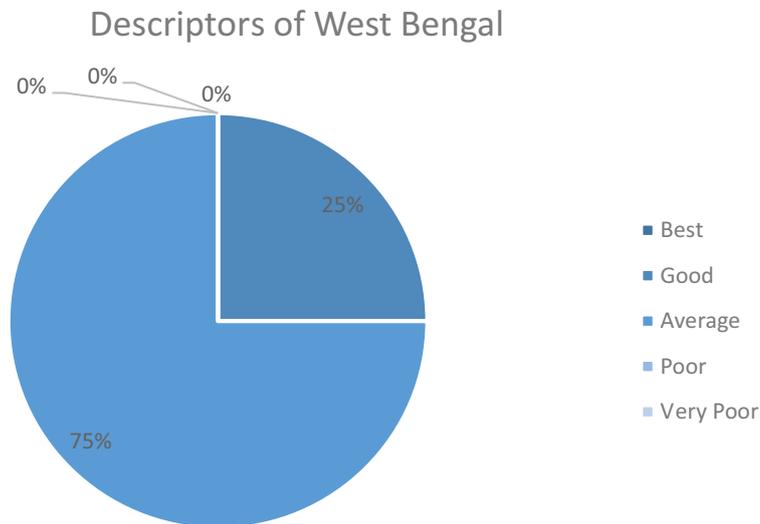


Figure 4.4: Performance based descriptors of West Bengal

'Best' and 'Good' indicates that lower level of intervention is required for the water bodies, whereas, 'Poor' and 'Very Poor' signifies that higher level of intervention is needed for rejuvenation and sustainability of the water bodies. In addition, medium level of intervention is required for water bodies lying under 'Average' category.

As per the figure, 25 per cent of the water bodies falls under 'Good' descriptor which requires less of revival and more measures of sustainability. Whereas, 75 per cent of water bodies lie in the 'Average' band. These require medium level of intervention for rejuvenation.

4.1.3 Key findings

The data was thoroughly revised and underwent a rigorous three-layered quality check so that important findings of the study could be highlighted for each state or district. Figure . : Key finding of water bodies found in West Bengal

'Figure 4.5' summarizes all the key findings with respect to the selected 4 Districts of West Bengal situated in Ganga Basin. Across these districts, a total of 1373

villages have been assessed by QCI. Out of which, a total of 558 water bodies were found in 360 Ganga villages during the survey. The percentage figures highlight that how many water bodies had the presence of below-mentioned parameters out of the total water bodies surveyed. These figures may be attributed to the performance of a water body in the 'Water Body Cleanliness Index'.

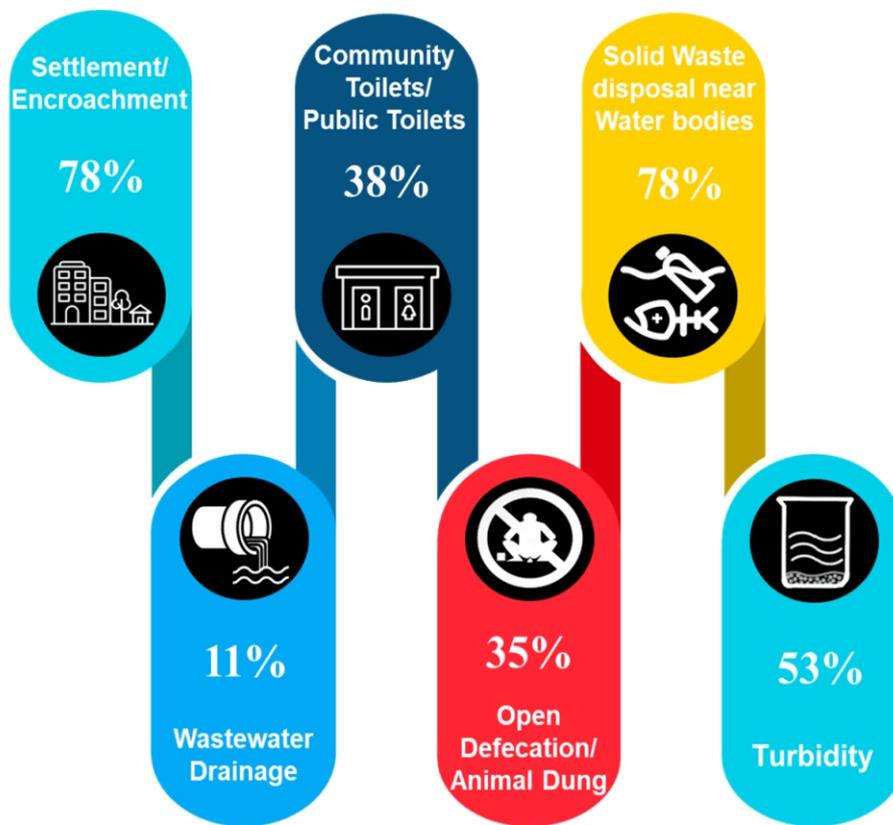


Figure 4.5: Key finding of water bodies found in West Bengal

4.1.3.1 Categorization of water bodies (Healthy/ Water hyacinth/Eutrophied/ Dried up)

Categorization constitutes the total number of water bodies found in each state based on their condition. This helps in determining the 'Level of Intervention' required. As per the data collected from on-field assessment, water bodies are divided into 4 categories.

Figure mentioned below is with respect to the categorization of 558 water bodies assessed during the survey:

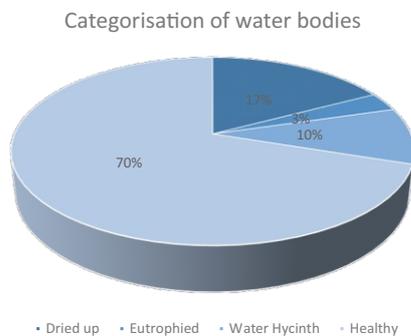


Figure 4.6: Categorization of water bodies

In West Bengal, only 70 per cent of the water bodies were found to be healthy and 10 per cent had Water hyacinth present in them. The study also found that, these water bodies had socio-economic benefits attached with them. For example: Domestic usage, Irrigation purposes, drinking water for cattle and pisciculture.

However, 17 per cent of the total water bodies were Dried-up. These water bodies were converted into dumping sites by the villagers according to the photographs received on assessment portal. Also, 3 per cent of the water bodies were found to be Eutrophied i.e. water bodies having algal blooms/layers and low oxygen saturation levels. It was found that villagers living nearby these water bodies, were not able to use water for any domestic or commercial benefits. Only Ground-water recharge could be done as per the key informants.

The results based on these findings indicated towards a dire need to implement rejuvenation plans to sustain the existing water bodies present in the Ganga basin.

4.1.3.2 Settlements under Catchment area

Catchment area of a water body plays a crucial role in determination of its overall health. Either it becomes a reason for its replenishment through sources like Storm water drainages or it can become a cause for its depletion due to contamination from Wastewater drainages, Industrial effluents and Solid waste disposal, which constitutes as factors of non-point source pollution. Hence, dense settlements in the catchment area can alter the status of the water bodies.

a. Figure mentioned below is with respect to the 'Settlements (within 250m)' found out of 558 water bodies assessed during the survey:

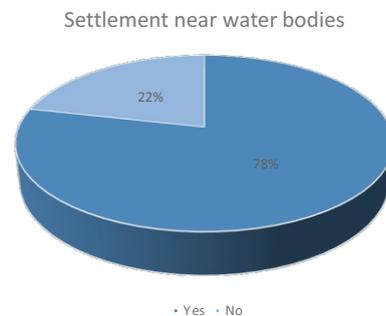


Figure 4.7: Settlement near water bodies

Settlements were found near 78 per cent of the total water bodies which can become a major reason for its contamination. Moreover, cases of illegal possession of land around the water bodies were found according to the citizen feedbacks.

b. Figure mentioned below is with respect to the percentage distribution of Settlement found near 438 water bodies across 4 districts:

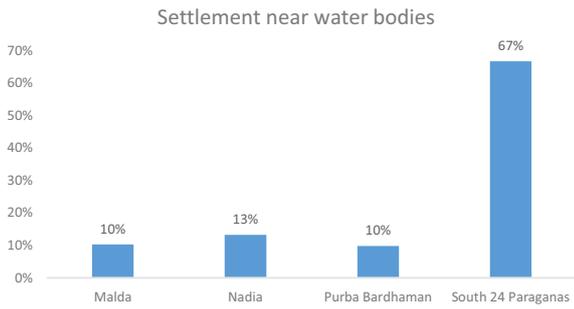


Figure 4.8: Settlement near water bodies (District-wise)

- Highest percentage of settlements was found near water bodies present in South 24 Paraganas district with 67 per cent.
 - Lowest percentage of Settlements was found near water bodies present in Districts: Malda and Purba Bardhaman with 10 per cent each.
- c. The figure mentioned below is with respect to the 'Percentage distribution of Type of Settlements' found near 438 water bodies across 4 districts:

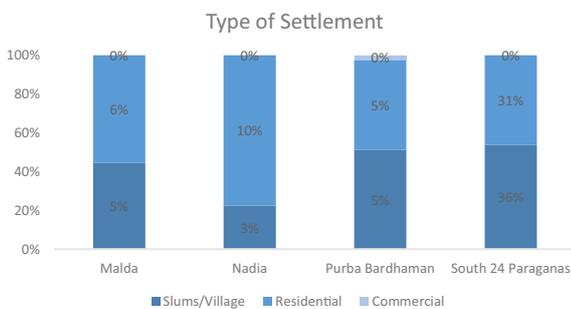


Figure 4.9: Type of Settlement (District-wise)

- Highest percentage of Slum/Village and Residential settlements was found in South 24 Paraganas with 36 per cent and 31 per cent respectively.
- Lowest percentage of Slum and Residential settlements was found in Districts: Nadia and Purba Bardhaman with 3 per cent and 5 per cent respectively.

About, 74 per cent of the water bodies having settlements nearby, were found to be either dried up or highly eutrophied. Hence, health of the water bodies present in these villages depended upon factors like Washing, Bathing, Leachate, Septic tank and its Drainage run-off.

Note: No Commercial settlement was found nearby water bodies assessed in West Bengal.

4.1.3.3 Drainage

A part of this survey focused on 'Wastewater' drainages found near the water bodies and their impacts on the Catchment area. These drainages had their outlets connected from nearby households, space available for washing/bathing, construction sites, small-scale factories and agricultural fields. Wastewater drainage is one of the major causes of contamination, which disturbs the ecosystem of a water body. On the other hand, Rain and Storm water drainages were found to be Natural sources for its replenishment.

- a. Figure mentioned below is with respect to the 'Wastewater drainage' found out of 558 water bodies assessed during the survey:

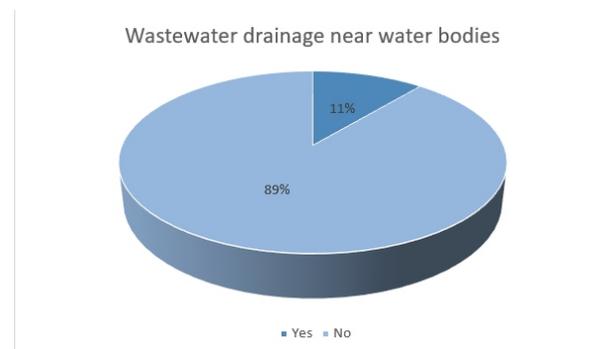


Figure 4.10: Wastewater drainage near water bodies

About 11 per cent of the total water bodies found in Uttar Pradesh were found having Wastewater drainage on its edge/nearby or connected in a way that it inflicted them primarily. Drainage run-off directly into the water bodies turned out to be one of the major factors for Algal blooms and Low oxygen saturation levels present in it.

b. Figure mentioned below is with respect to the percentage distribution of Wastewater drainage found near 62 water bodies across 4 districts:

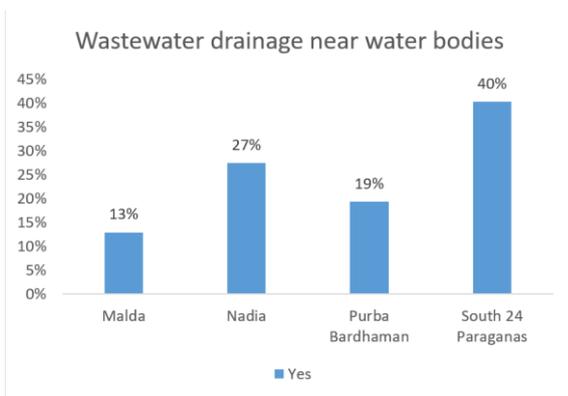


Figure 4.11: Wastewater drainage near water bodies (District-wise)

- Highest percentage of wastewater drainage was found near water bodies present in the South 24 Paraganas with 40 per cent.
 - Lowest percentage of wastewater drainage was found near water bodies present in the Malda with 13 per cent each.
- c. Figure mentioned below is with respect to the 'Drainage' near 62 water bodies assessed during the survey:

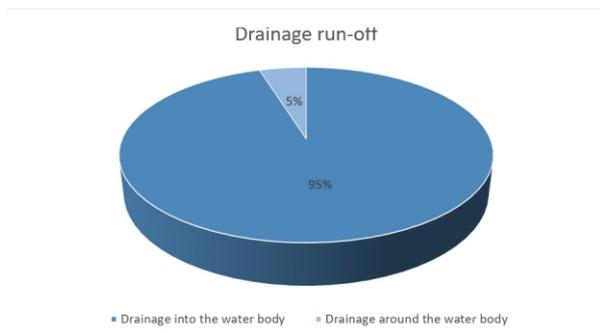


Figure 4.12: Drainage

About 95 per cent of the drainage directly flow into the water bodies. However, only 5 per cent of the total drainages flows around/on the edge of water bodies.

This study states that flow of Storm-water drainage directly into the water bodies replenished them. On the other hand, flow of wastewater drainage directly into water bodies is harmful for its health. Moreover, it was observed that Secondary treatment plant or Filtration mechanism were not found near water bodies.

As per the assessment, only four water bodies present in the Blocks: Sagar, Pathar Pratima and Diamond Harbour - II of South 24 Paraganas with drainage outlets were found to have Screens/Mesh/Grills/Bars at its openings. This implied that the rest 99 per cent did not have any such screens at the opening of its drainage. Hence, paving the way for accumulation of solid waste and excessive nutrients into the water bodies.

4.1.3.4 Correlation

Correlation of dried-up water bodies with road connectivity came out as 0.5616. It can be interpreted that construction of road is a one of the causes of water bodies ending up dried.

4.1.3.5 Solid waste found around/on the surface of water bodies

Absence of dustbins near water bodies resulted in increased accumulation of wet and dry waste that subsequently led to its contamination. Additionally, leachate formed due to accumulation of dry and wet waste causes foul smell and foaming, which directly affected health of the water bodies.

a. Figure mentioned below is with respect to the Solid Waste present around/on the surface out of 558 water bodies assessed during the survey:

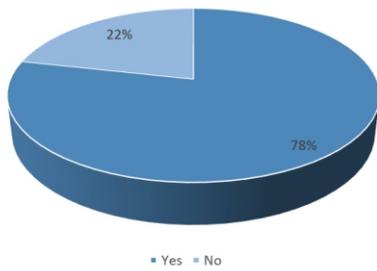


Figure 4.13: Waste around/on the surface of water bodies

Out of 558, 438 water bodies had solid waste present around/on its surface. Furthermore, it was found that, there were no methods of Fine mechanisms or Anti-littering signage near public water bodies to discourage such unhealthy activities.

Hence, it is observed that awareness campaigns were primarily needed to be conducted to avoid such uninhabitable conditions.

b. Figure mentioned below is with respect to the percentage distribution of Solid waste found around/on the surface of 438 water bodies across 4 districts:

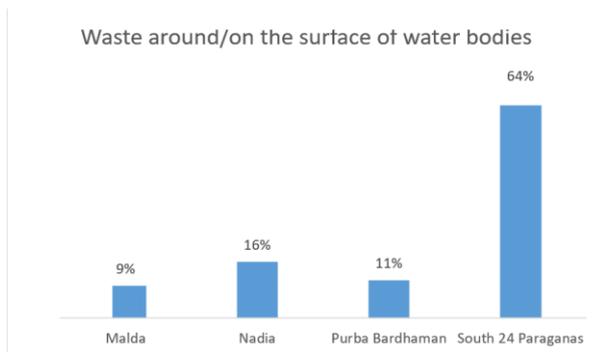


Figure 4.14: Waste around/on the surface of water bodies (District-wise)

Solid waste was found around/on the surface of 100 water bodies. District-wise bifurcation of the same is mentioned in the above figure.

- South 24 Paraganas was found with highest percentage of solid waste around/on the surface of water bodies with 64 per cent.
- Malda was marked with lowest percentage of solid waste found around/on the surface of water bodies with 9 per cent.

4.1.3.6 Community toilet/Public toilet management near water bodies

a. Figure mentioned below is with respect to the 'Community toilet/Public toilet' found out of 558 water bodies assessed during the survey:

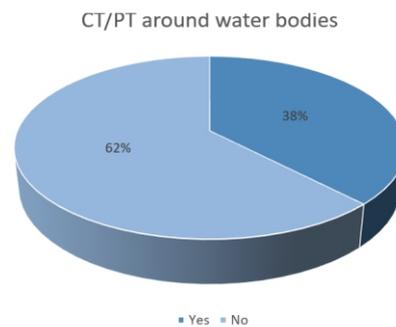


Figure 4.15: CT/PT around water bodies

Community/Public toilets found near the water bodies in West Bengal were found to be proper or usable. Small cubicles were found during the assessment, which constitutes only 38 per cent of the total water bodies.

The toilets should be made at a distance of 50 meters at least, so that it does not lead to open defecation and open urination near water bodies. Furthermore, septic tank waste can be prevented from entering the water bodies and safe disposal could be ensured.

Hence, non-availability of the same leads to Open Defecation and Open Urination nearby water bodies.

b. Figure mentioned below is with respect to the 'Percentage distribution of Community/Public toilet' found near 211 water bodies across 4 districts:

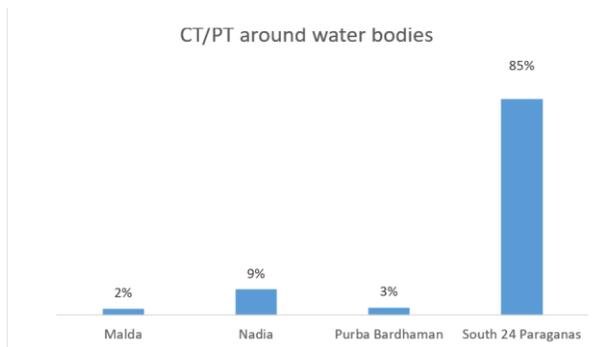


Figure 4.16: CT/PT around water bodies (District-wise)

- Highest percentage of community/public toilet was found near water bodies present in South 24 Paraganas which accounts to 85 per cent.
- Lowest percentage of community/public toilet was found near water bodies present in Malda with 2 per cent.

4.1.3.7 Open Defecation (Animal dung/ Human faecal matter) found

a. Figure mentioned below is with respect to the 'Open Defecation' found out of 558 water bodies assessed during the survey:

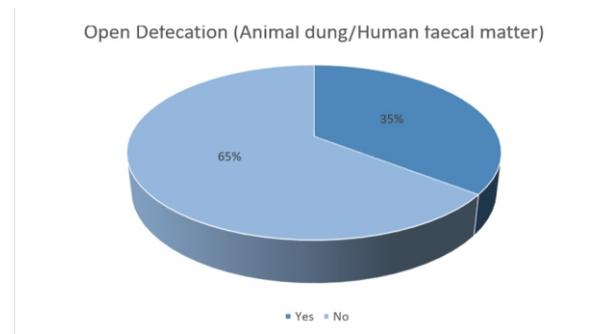


Figure 4.17: Open Defecation (Animal dung/Human faecal matter)

Open Defecation was found around 35 per cent of the total water bodies that were found in West Bengal. Rest of the water bodies did not have any sign of Animal dung or Human faecal matter around them.

During such practices, excessive nutrients which constitutes a major proportion of Nitrogen and Phosphorus, enters the water body through Animal dung and Human feces. This turns out to be a reason for excessive plants and algal growth in water bodies. Such conditions can lead to sickness and poor health in humans.

b. Figure mentioned below is with respect to the percentage distribution of Open Defecation' found near 198 water bodies across 4 districts:

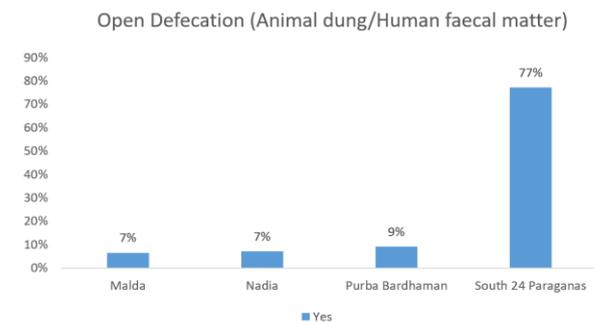


Figure 4.18: Open Defecation: Animal dung/Human faecal matter (District-wise)

- Highest percentage of Open Defecation was found near water bodies present in South 24 Paraganas with 77 per cent.
- Lowest percentage of Open Defecation was found near water bodies present in Districts: Malda and Nadia with 7 per cent each.

4.1.3.8 Turbidity assessment (Water quality)

Turbidity test could be undertaken for 85% (Healthy + Water Hyacinth + Eutrophication) of the total water bodies found in West Bengal.

Figure 4.19 mentioned below is with respect to 'Turbidity (Beaker test)' of water present in 476 water bodies during assessment:

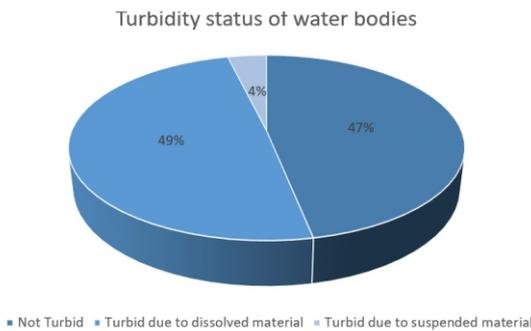


Figure 4.19: Turbidity status of water bodies

Non-point sources of pollution like Agricultural fields, Industry/factory and Construction sites discharging excessive nutrients/minerals, harmful chemicals/effluents and Silt respectively, were found to be directly affecting the water quality. On the other hand, local habitat activities such as Washing, Drain connect, Open Defecation played a direct role in worsening the water body's health.

About 47 per cent of the total water bodies were found to be 'Not Turbid'. This implied that the quality of water is good whereas, 49 per cent of the water bodies were found to be 'Turbid due to dissolved material'. It means, mud/silt is present in huge amount.

Only 4 per cent of the water bodies were found to be 'Turbid due to suspended material', which defines the presence of heavy siltation, small pebbles and other solid waste. However, a scientific exception stating presence of temporary siltation and small stones/pebbles was not considered damaging the health of water bodies.

These factors lead to the Eutrophication (formation of layers of Algae), which by time lowers the oxygen saturation levels, blocks sunlight to reach water body's bed and ultimately damages its eco-system. Accumulation of solid waste on the surface of water bodies and its Bed majorly disrupts daily utility benefits, which the local inhabitants enjoy. Some of the major disruptive activities includes pious activities, Idol immersion, disposing Clothes, Leather, Plastics, Tin, etc.

4.1.3.9 Additional indicators

Figure depicted below is with respect to some other indicators of 558 water bodies that were assessed during the survey:

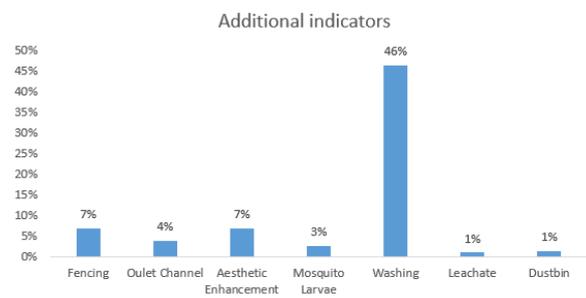


Figure 4.20: Additional indicators assessed during the survey

Fencing can be metal, Cemented, Barbed wire, Wooden, Vinyl or made of Plant (Bio-fencing) to restrict unwanted entry of cattle near water bodies. On-ground assessment indicates that only 7 per cent of the total water bodies had fencing on its periphery. Bio-fencing plays a major role in maintaining health of a water body and works as a shield against non-point sources of pollution. In addition, small trees on the edges of a water body holds the Pal (Boundary) in order to maintain the water body's depth.

4 per cent of the total water bodies had **Outlet channels** to deal with the overflow and flood like conditions. Cemented and Mud-pitched type outlet channels were found during the survey, which is a good sign for any water body.

Villagers find it inconvenient to get utility benefits from water bodies especially during high temperatures in absence of sheds, as per the survey. It was observed that only 7 per cent of the total water bodies have **Aesthetic enhancement**/beautification around them, which might include benches, bridges, fencing, sheds and grass/gardening.

Mosquito Larvae was found in 3 per cent of the total water bodies. It was majorly detected through Turbidity tests undertaken by assessors in a transparent beaker or transparent disposable container. Villagers do not consume this water due to its high contamination level/load of pollutants as well as the fact that the area is prone to diseases like Malaria, Dengue and Chikungunya.

'Washing' (under 50m) as an activity was observed around/on the edges of 46 per cent of the total water bodies. This contaminated the water bodies directly as per direct observation. 'Grey water' is claimed to be harmful for water bodies as it enters without any secondary treatment or filtration process. In a similar manner, 1 per cent of the total water bodies were found to be contaminated by direct flow of **leachate**.

Only 1 per cent of **dustbins** were present near water bodies for Solid Waste Management (SWM). Absence of dustbins leads to accumulation of waste around and on the surface of water bodies, which is harmful for its health.

4.1.4 District Overview: Report card and Scorecard

4.1.4.1 DISTRICT REPORT: PURBA BARDHAMAN

Configuration

The following bar graph represents the count of water bodies along with the number of villages assessed in a particular block.

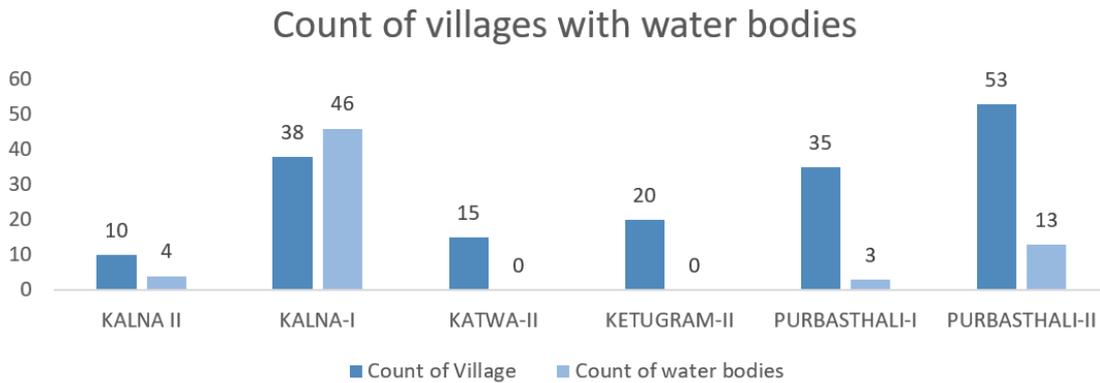


Figure 4.21: Count of villages in Purba Bardhaman with water bodies

Eight blocks of Purba Bardhaman district were found to have water bodies within Ganga basin. 66 water bodies were identified during the survey of 171 villages in Purba Bardhaman.

- Highest number of water bodies were found in Kalna-I block with 46 water bodies in 38 villages.
- Only 3 water bodies were found in 35 villages of Purbastali-II block, lowest in the Purba Bardhaman district.
- Highest number of villages were assessed in Purbasthali-II block (53 villages) where only 13 water bodies were found.

No water bodies could be found in Katwa-II and Ketugram-II block. Hence, no parameters could be assessed for them.

Categorization of the water bodies

Water bodies have been categorized in four groups based on their status: Healthy, Water-Hyacinth, Eutrophication, and Dried-up.

A water body is categorized as **Healthy** if the general appearance is clean and traces/layer of algae is not present in it.

Presence of **Water-hyacinth** is safe for the water bodies until it is present in controlled amount. This plant requires threshing to prevent blockage, so that sunlight could reach the water body bed and it does not become a home for disease-carrying mosquitoes.

A **dried-up** water body indicates that the catchment yield and inlet systems for its replenishment are not active or blocked.

Eutrophication is caused due to presence of excessive nutrients like Phosphorous and Sulphur in water bodies, which can enter through non-point sources of pollution. This leads to increased amount of plant and algal growth, which damages the aquatic life and ecosystem of the water bodies. Water bodies under such condition are on the verge of depletion and requires higher level of intervention.

Categorization of water bodies

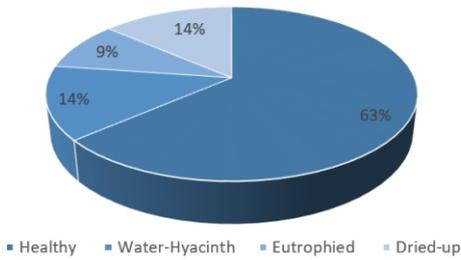


Figure 4.22: Categorization of water bodies in Purba Bardhaman

The study found that 63 per cent of the water bodies fall under Healthy category and 14 per cent had Water Hyacinth in them. Another 14 per cent was dried up and rest 9 per cent was eutrophied.

Turbidity

Turbidity test was undertaken for 57 water bodies of Purba Bardhaman district, as per the availability of water.

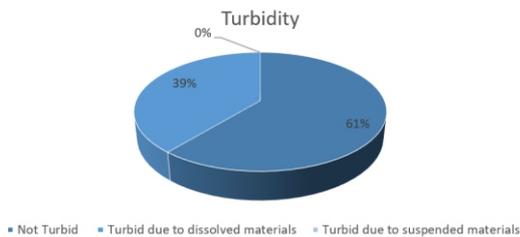


Figure 4.23: Turbidity in water bodies of Purba Bardhaman

As per figure 4.23, 46 per cent of the water bodies came out to be 'Not Turbid' that denotes clear and transparent water which is good for usage and health of habitat situated nearby.

Additionally, 39 per cent of them hold their status as 'Turbid due to dissolved material' that contains a major proportion of mud and silt.

Settlement near water bodies

Figure 4.24 depicts block-wise 'Percentage distribution of Settlement' found in Purba Bardhaman district. 100% accountability has been captured under 4 blocks with a total count of 66 Water bodies, having settlement present within 200-250 meters of its radius.

As high as 72 per cent of water bodies in Kalna-I are surrounded by settlements. 7 per cent of water bodies each in Kalna-II and Purbasthali-I blocks were surrounded by settlements.

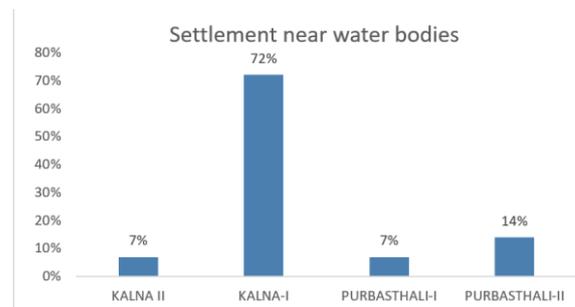


Figure 4.24: Settlement near water bodies in Purba Bardhaman

Figure 4.25 configures two types of settlement, which denotes that Slums/village type of settlement surrounds 48 per cent of water bodies in Purba Bardhaman district and Residential type of settlement surrounds 52 per cent of water bodies.

Type of Settlement

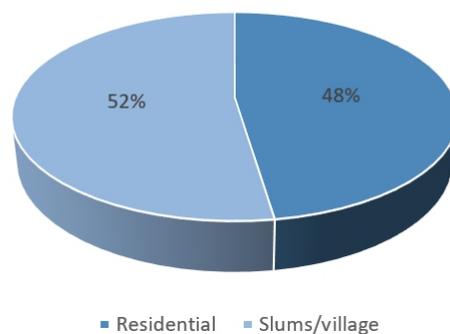


Figure 4.25: Type of Settlement around water bodies in Purba Bardhaman

Type of settlement plays a major role in determining the catchment yield of a water body. Difference in type and load of pollutants was observed through a Slum area and a Residential area. For example: Animal dung, chemical/fertilizers from Slum/village area becomes the cause of pollution in water bodies and on the other hand Solid waste, Silt from under-construction sites in Residential areas are the causes of contamination. However, in exceptional cases the load of pollutants entering into a water body may not vary as per our Project Expert.

Wastewater drainage and Solid waste

Pie-chart, Figure 4.26 represents Wastewater drainage present near water bodies assessed in Purba Bardhaman where 18 per cent of the water bodies get contaminated through wastewater drainage as a cause of direct run-off.

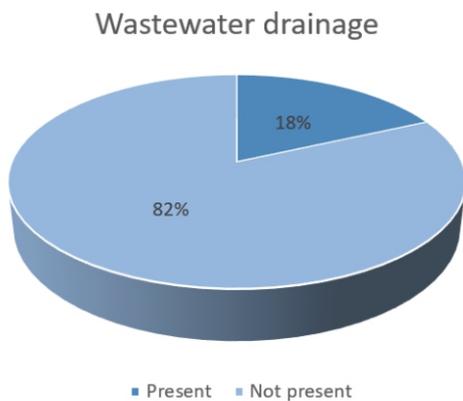


Figure 4.26: Wastewater drainage in and around water bodies in Purba Bardhaman

As per figure 4.27, it was observed that,

- As high as 78 per cent of water bodies in Kalna-I have solid waste present in/around them.
- Purbasthali-I accounts 4 per cent of water bodies having solid waste present in/around them.

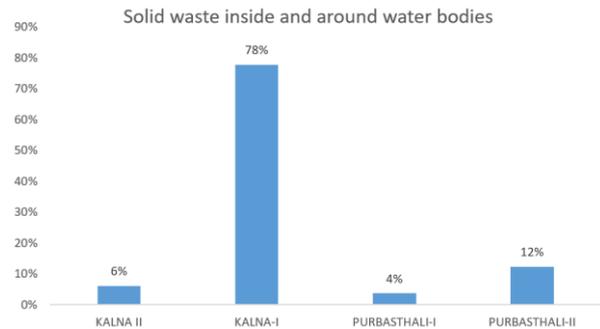


Figure 4.27: Solid waste inside and around water body in Purba Bardhaman

Wastewater drainages present in residential area settlements may cause accumulation of solid waste near and on the surface of water bodies. Screens/mesh/bars restricts solid waste from entering into the water body. However, pollutants which enters the water bodies along with the solid waste and wastewater drainages deteriorate the quality of water present in it. Excessive nutrients like Phosphorus and Sulfur coming from these non-point sources of pollution leads to eutrophication, which damages the overall health of the water bodies.

DISTRICT SCORECARD: PURBA BARDHAMAN

Block-wise scores and Descriptors

Below is a tabular representation of the scores backed by each block of Purba Bardhaman along with its grade and rank.

Rank	Block	Score	Descriptors
1	Purbasthali-II	195.5	Good
2	Kalna-I	188.3	Good
3	Kalna-II	181.8	Good
4	Purbasthali-I	163.9	Average

Table 9: Ranking of Blocks in Purba Bardhaman based on scores

Graphical representation of block-wise scores of Purba Bardhaman

Scores have been summarized on the basis of all the seven indicators which were considered as the key factors for evaluation of the water bodies out of a total marks of 300.

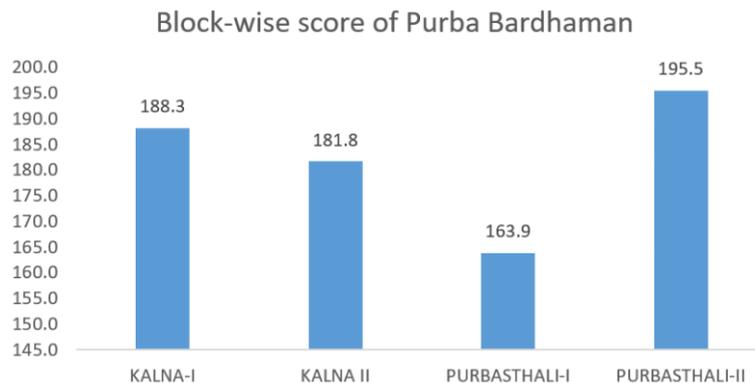


Figure 4.28: Block-wise score of Purba Bardhaman

On the basis of performance, it was found that water bodies present in various blocks of Purba Bardhaman stands with an average score of 182.36 out of 300. The resultant score indicates a 'Good' performance by Purba Bardhaman district.

- Purbasthali-II tops the chart among other four blocks, by obtaining an average score of 195.5 out of 300.
- Lowest score has been attained by Purbasthali-I as 163.9 among the four blocks.

Indicator-wise scores of Purba Bardhaman

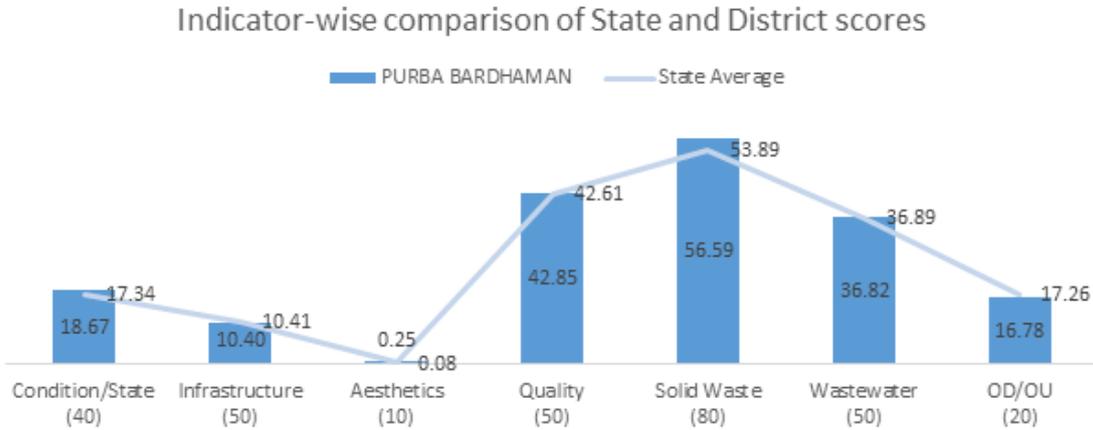


Figure 4.29: Indicator-wise scores of Purba Bardhaman

Above bar graph represents the overall score of Purba Bardhaman district. Evaluation of scores and grades was done on the basis of seven key indicators mentioned below:

- 1. Functionality**, which play a significant role in determining overall health a water body and the reason for its rejuvenation or depletion. Factors affecting the functionality of water bodies are types of settlement and septic tanks present near them.
- 2. Infrastructure** signifies the physical structure of a water body, which includes the condition of fencing, road connectivity around the water body and outlet channel to ensure drain-out of overflow. This indicator plays a vital role in resolving the issue of water bodies being dried-up.
- 3. Aesthetics (Aesthetic enhancement)** includes beautification around the water bodies, which includes benches, religious architectures, sheds, grass/gardening, etc.

- 4. Quality** as an indicator comprise of factors like turbidity status, eutrophication, and formation of foam, which comprehends the severity in terms of quality of water present in a water body.
- 5. Solid Waste** includes waste present around/on the surface of water bodies. It checks on factors like availability of the dustbins, flies over the Garbage Vulnerable Points (GVPs) and leachate coming out from it, which might directly contaminate a water body.
- 6. Wastewater** includes the status and type of drainage run-off and direct contamination of water body due to it.
- 7. OD/OU** indicator indicates the presence of the human faecal matter, animal dung and urination around water body. It acts as a major role behind the growth of algae and plants into the water body.

The line graphs depicts indicator-wise State average of the survey and the bar graph represents the indicator wise scores of Purba Bardhaman district.

- In terms of Infrastructure, Aesthetics, Quality, and Wastewater Purba Bardhaman maintains the mean score corresponding to the State score.
- Whereas, in terms of Condition/State and Solid waste disposal, score of Purba Bardhaman is better than the State score.
- However, Purba Bardhaman performed poorer than the State in terms of OD/OU.

Performance based descriptors of Purba Bardhaman

Cleanliness index of Purba Bardhaman

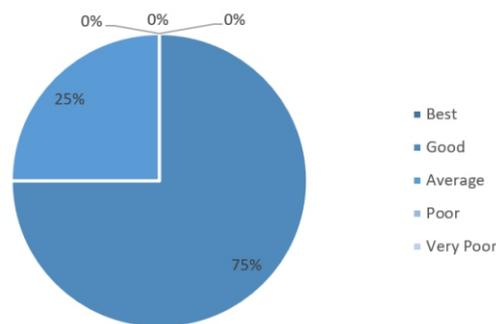



Figure 4.30: Cleanliness index of Purba Bardhaman

Water bodies found in various blocks of Purba Bardhaman were lying under different descriptors as per their performances. These descriptors are characterized by different water body indicators, which denotes water body Cleanliness Index.

'Best' and 'Good' indicates that lower level of intervention is required, whereas, 'Poor' and 'Very Poor' signifies that higher level of intervention is needed for rejuvenation and sustainability of a water body. Furthermore, medium level of intervention is required for water bodies lying under 'Average' category.

As per the figure, 75 per cent of the water bodies fall under 'Good', which require less of revival and more of sustainability. Whereas, 25 per cent of water bodies lie in the Average band. These require medium level of intervention for rejuvenation.


Images of water bodies in Purba Bardhaman

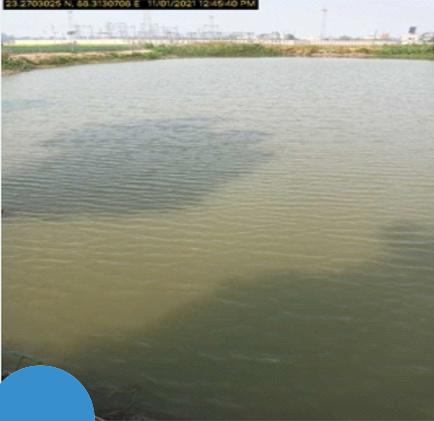

WB_DHATRIGRAM
(CT)_320495_018321_W1



Water Hyacinth
WB_SATAPATI_320567_018282_W2

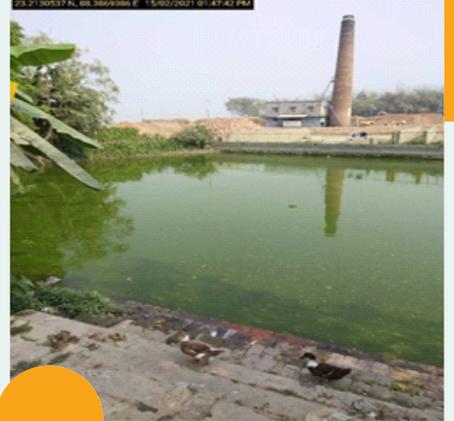

Eutrophied
WB_HANSPUKUR (P)_320564_018241_W1




Dried up
WB_RUSTAMPUR_320488_018433_W3



Aesthetic Enhancement
WB_KALNA (P)_320492_018381_W1



CT or PT nearby
WB_KALNA (P)_320492_018381_W1

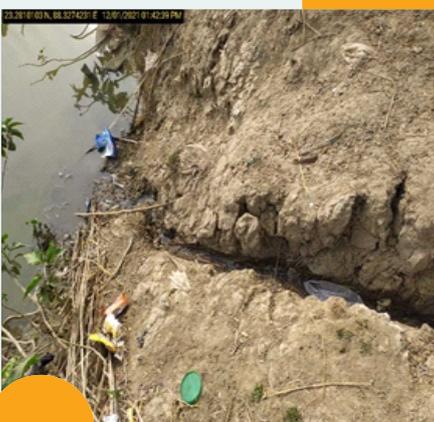

Drainage connected
WB_HATIPOTA_Tmp512864_027293_W3



Dustbin nearby
WB_KALNA (P)_320492_018381_W1



Not turbid
WB_SATAPATI_320567_018282_W2



Settlement nearby

WB_KHARINAN_320432_018515_W5



Waste around

WB_HANSPUKUR (P)_320564_018241_W1



Waste on the surface

WB_KHARINAN_320432_018513_W3

4.1.4.2 DISTRICT REPORT: NADIA

Configuration

The following bar graph represents the count of water bodies along with the number of villages assessed in a particular block.

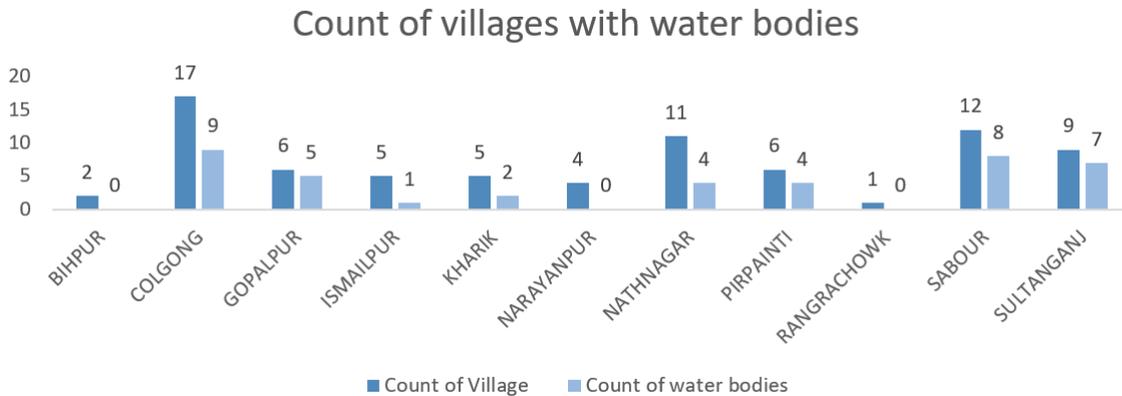


Figure 4.31: Count of villages in Nadia with water bodies

Eight blocks of Nadia district were found to have water bodies within Ganga basin. 89 water bodies were identified during the survey of 277 villages in Nadia.

- 25 villages were assessed in Chakdah block where 41 water bodies were found, the highest in the district.
- Only 1 water body was found in 4 villages Krishnagar-II block.

No water bodies could be found in Ranaghat-I block with 36 villages, hence, no parameters could be assessed there.

Categorization of the water bodies

Water bodies have been categorized in four groups based on their status: Healthy, Water-Hyacinth, Eutrophication, and Dried-up.

A water body is categorized as **Healthy** if the general appearance is clean and traces/layer of algae is not present in it.

Presence of **Water-hyacinth** is safe for the water bodies until it is present in controlled amount. This plant requires threshing to prevent blockage, so that sunlight could

reach the water body bed and it does not become a home for disease-carrying mosquitoes.

A **dried-up** water body indicates that the catchment yield and inlet systems for its replenishment are not active or blocked.

Eutrophication is caused due to presence of excessive nutrients like Phosphorous and Sulphur in water bodies, which can enter through non-point sources of pollution. This leads to increased amount of plant and algal growth, which damages the aquatic life and ecosystem of the water bodies. Water bodies under such condition are on the verge of depletion and requires higher level of intervention.

Categorization of water bodies

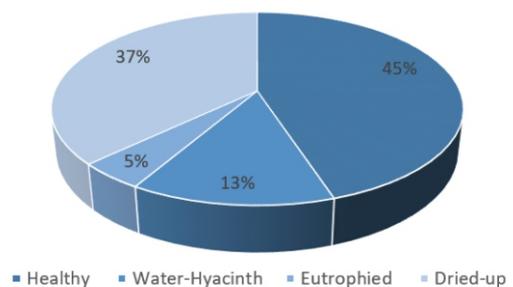


Figure 4.32: Categorization of water bodies in Nadia

The study found that 45 per cent water bodies fall under Healthy category and 37 per cent of the total water bodies fall under Dried-up category. 5 per cent of water bodies were found to be Eutrophied and 13 per cent of the total water bodies have Water hyacinth.

Hence, less than 50 per cent of the water bodies lie under Healthy category, which is a sign of poor catchment yield and lack of awareness among the locals.

Turbidity

Turbidity test was undertaken for 32 water bodies of Nadia district, as per the availability of water.

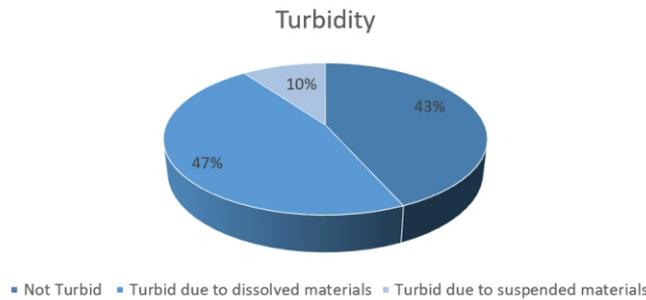


Figure 4.33: Turbidity in water bodies of Nadia

As per Figure 4.33, 43 per cent of the water bodies came out to be 'Not Turbid' that denotes clear and transparent water which is good for usage and health of habitat situated nearby.

Whereas, 10 per cent of the water bodies were found as 'Turbid due to Suspended material' which contains heavy particles of silt and thick traces of algae. In addition, 47 per cent of them hold their status as 'Turbid due to dissolved material' that contains a major proportion of mud and silt.

Settlement near water bodies

Figure 4.34 depicts block-wise 'Percentage distribution of Settlement' found in Nadia district. 100% accountability has been captured under 7 blocks with a total count of 41 Water bodies, having settlement present within 200-250 meters of its radius. Highest percentage of settlements were found around the water bodies in Chakdah block and least in Krishnagar-I. No settlement was available near water bodies, which were found in Santipur block.

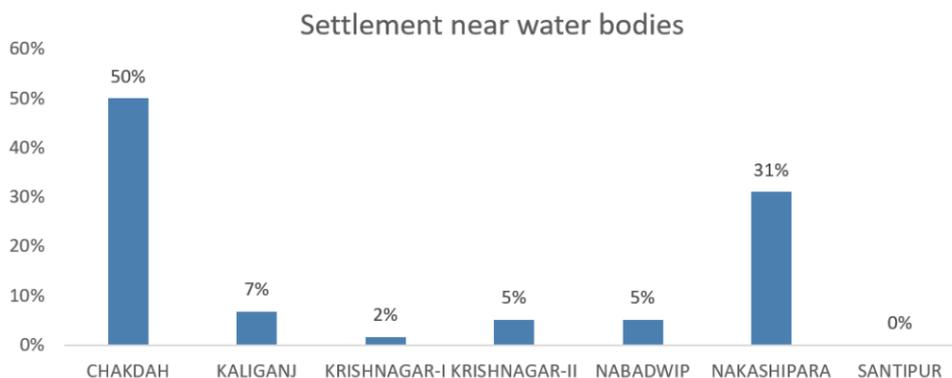


Figure 4.34: Settlement near water bodies in Nadia

Figure 4.35 configures two types of settlement, which denotes that 78 per cent of water bodies in Nadia district is surrounded by Residential type of settlement whereas 22 per cent of water bodies are surrounded by Slum/village.

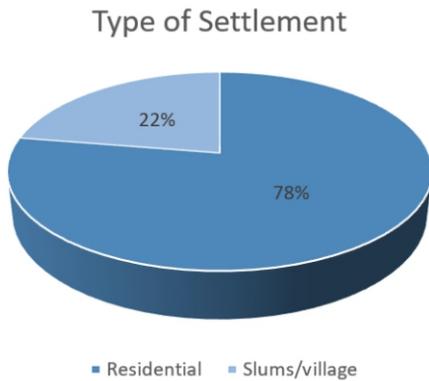


Figure 4.35: Type of Settlement around water bodies in Nadia

Type of settlement plays a major role in determining the catchment yield of a water body. Difference in type and load of pollutants was observed through a Slum area and a Residential area. For example: Animal dung, chemical/fertilizers from Slum/village area becomes the cause of pollution in water bodies and on the other hand Solid waste, Silt from under-construction sites in Residential areas are the causes of contamination. However, in exceptional cases the load of pollutants entering into a water body may not vary as per our Project Expert.

Wastewater drainage and Solid waste

Pie-chart, 4.36 represents Wastewater drainage present near water bodies assessed in Nadia where 19 per cent of the water bodies get contaminated through wastewater drainage as a cause of direct run-off.

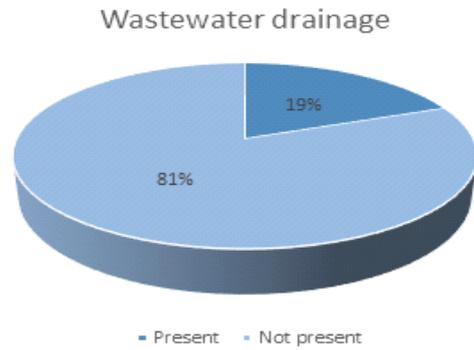


Figure 4.36: Wastewater drainage in and around water bodies in Nadia

As per figure 4.37, it was observed that,

- Highest percentage (55 per cent) of water bodies had solid waste in and around them in Chakdah.
- 28 per cent of water bodies in Nakashipara solid waste present in/around them.
- Krishnagar-I and Santipur accounts 1 and 2 per cent of water bodies with solid waste present in/around them.

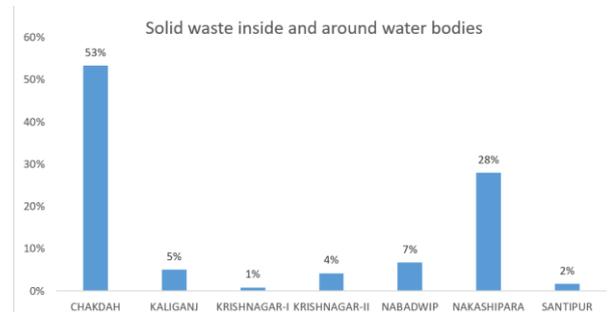


Figure 4.37: Solid waste inside and around water body in Nadia

Wastewater drainages present in residential area settlements may cause accumulation of solid waste near and on the surface of water bodies. Screens/mesh/bars restricts solid waste from entering into the water body. However, pollutants which enters the water bodies along with the solid waste and wastewater drainages deteriorate the quality of water present in it. Excessive nutrients like Phosphorus and Sulfur coming from these non-point sources of pollution leads to eutrophication, which damages the overall health of the water bodies.

DISTRICT SCORECARD: Nadia

Block-wise scores and Descriptors

Below is a tabular representation of the scores backed by each block of Nadia along with its grade and rank.

Rank	Block	Score	Descriptors
1	Kaliganj	198.3	Good
2	Santipur	195.6	Good
3	Chakdah	180.2	Good
4	Krishnagar - II	177.8	Average
5	Krishnagar - II	175.0	Average
6	Nabadwip	162.3	Average
7	Nakashipara	161.0	Average

Table 10: Ranking of Blocks in Nadia based on scores

Graphical representation of block-wise scores of Nadia

Scores have been summarized on the basis of all the seven indicators which were considered as the key factors for evaluation of the water bodies out of a total marks of 300.

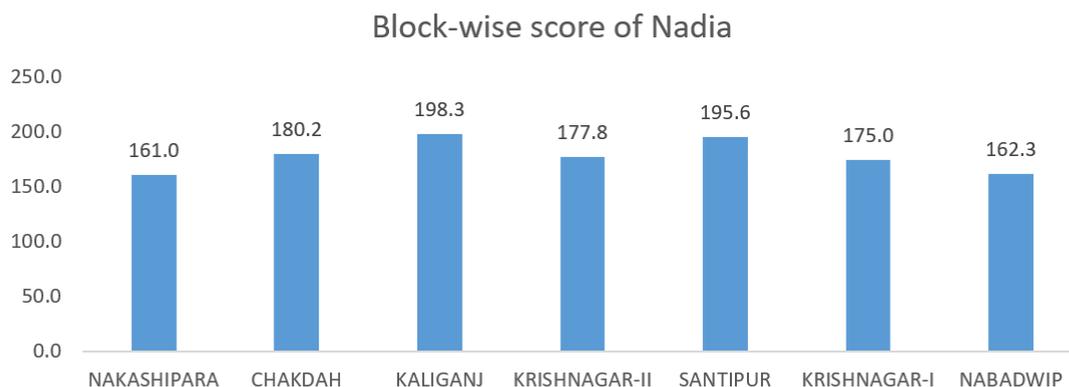


Figure 4.38: Block-wise score of Nadia

On the basis of performance, it was found that water bodies present in various blocks of Nadia stands with an average score of 178.60 out of 300. The resultant score indicates a 'Average' performance by Nadia district.

- Kaliganj tops the chart among other eight blocks, by obtaining an average score of 198.3 out of 300.
- Lowest score has been attained by Nakashipara as 161 among the eight blocks.

Indicator-wise scores of Nadia

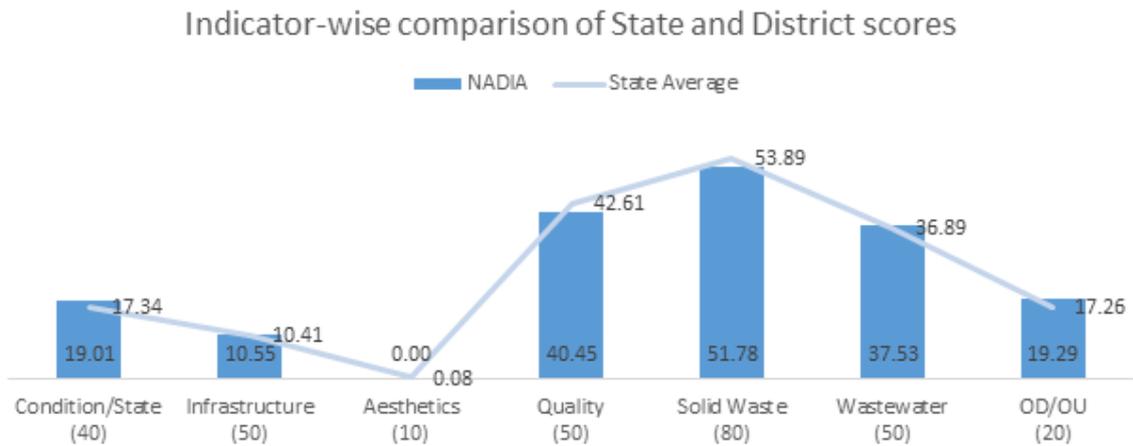


Figure 4.39: Indicator-wise scores of Nadia

Above bar graph represents the overall score of Nadia district. Evaluation of scores and grades was done on the basis of seven key indicators mentioned below:

- 1. Functionality**, which play a significant role in determining overall health a water body and the reason for its rejuvenation or depletion. Factors affecting the functionality of water bodies are types of settlement and septic tanks present near them.
- 2. Infrastructure** signifies the physical structure of a water body, which includes the condition of fencing, road connectivity around the water body and outlet channel to ensure drain-out of overflow. This indicator plays a vital role in resolving the issue of water bodies being dried-up.
- 3. Aesthetics (Aesthetic enhancement)** includes beautification around the water bodies, which includes benches, religious architectures, sheds, grass/gardening, etc.
- 4. Quality** as an indicator comprise of factors like turbidity status, eutrophication, and formation of foam, which comprehends the severity in terms of quality of water present in a water body.
- 5. Solid Waste** includes waste present around/on the surface of water bodies. It checks on factors like availability of the dustbins, flies over the Garbage Vulnerable Points (GVPS) and leachate coming out from it, which might directly contaminate a water body.
- 6. Wastewater** includes the status and type of drainage run-off and direct contamination of water body due to it.

7. OD/OU indicator indicates the presence of the human faecal matter, animal dung and urination around water body. It acts as a major role behind the growth of algae and plants into the water body.

The line graphs depicts indicator-wise State average of the survey and the bar graph represents the indicator wise scores of Nadia district.

- In terms of Aesthetics and Infrastructure, Nadia maintains the mean score corresponding to the State score.
- Whereas, in terms of Condition/State, Wastewater and OD/OU, score of Nadia is better than the State score.
- However, Nadia performed poorer than the Quality and Solid waste disposal.

Performance based descriptors of Nadia

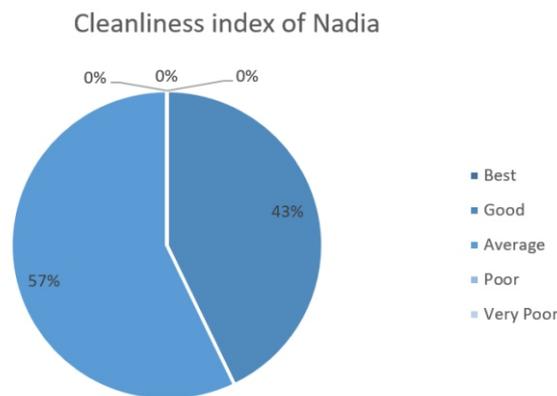


Figure 4.40: Cleanliness index of Nadia

Water bodies found in various blocks of Nadia were lying under different descriptors as per their performances. These descriptors are characterized by different water body indicators, which denotes water body Cleanliness Index.

'Best' and 'Good' indicates that lower level of intervention is required, whereas, 'Poor' and 'Very Poor' signifies that higher level of intervention is needed for rejuvenation and sustainability of a water body. Furthermore, medium level of intervention is required for water bodies lying under 'Average' category.

As per the figure, 43 per cent of the water bodies fall under 'Good' category, which requires less of revival and more of sustainability. Whereas, 57 per cent of water bodies lie in the Average band. These require medium level of intervention for rejuvenation.

Images of water bodies in Nadia




Healthy
WB_BARAKULIA_Tmp512855_027201_W1



Water Hyacinth
WB_CHAR NANDAN BATI_322304_032073_W13



Dried up
WB_GABARKULI_321631_016981_W1

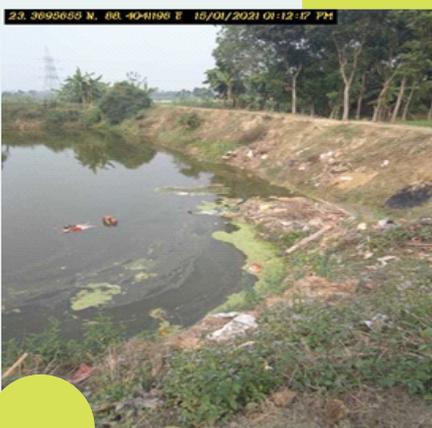


Eutrophied
WB_PANSILA_321673_017141_W1



Drainage connected
WB_CHAR NANDAN BATI_322304_016102_W2




Fencing
WB_CHANDURIA 1_Tmp321369_031731_W1

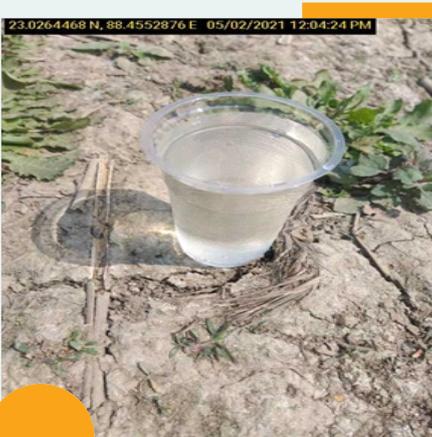

Not turbid
WB_TARINIPUR_321838_016166_W6



OD
WB_CHANDANPUR_310266_017323_W3

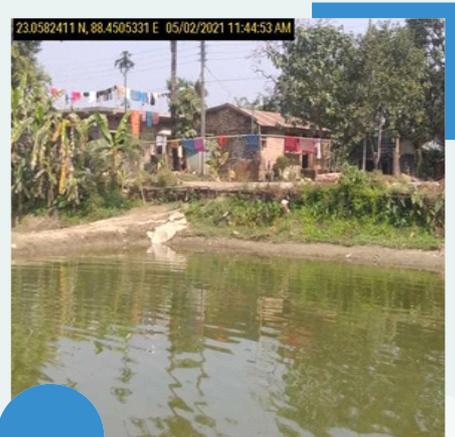


Settlement nearby
WB_TARINIPUR_321838_016166_W6



Turbid due to suspended material
WB_TARINIPUR_321838_016161_W1



Waste around
WB_CHANDURIA 1_Tmp321369_031731_W1

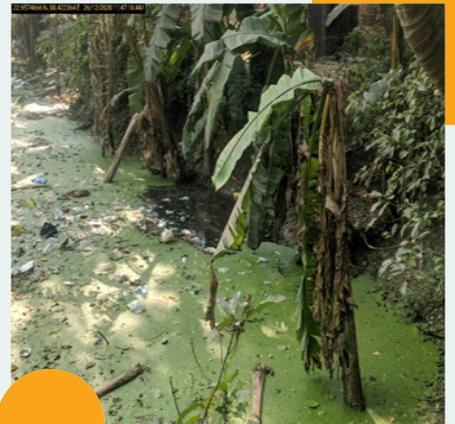

Waste on the surface
WB_CHAR NANDAN BATI_322304_016109_W9

4.1.4.3 DISTRICT REPORT: SOUTH 24 PARAGANAS

Configuration

The following bar graph represents the count of water bodies along with the number of villages assessed in a particular block.

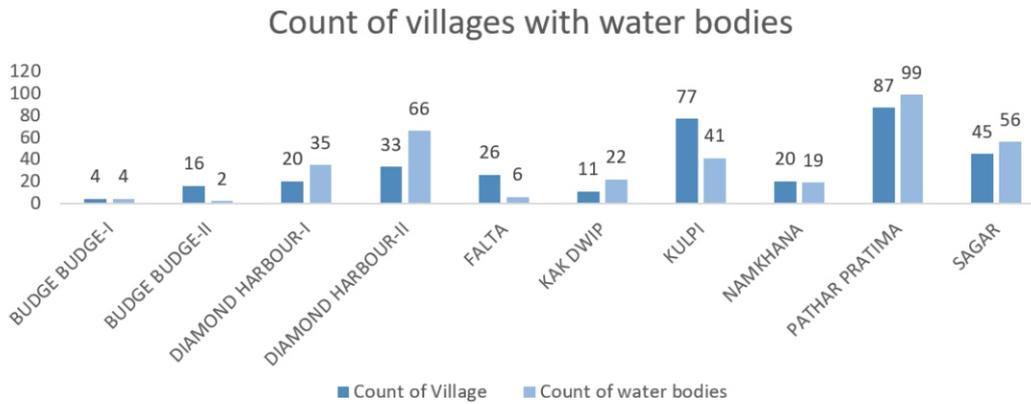


Figure 4.41: Count of villages in South 24 Paraganas with water bodies

Ten blocks of South 24 Paraganas district were found to have water bodies within Ganga basin. 350 water bodies were identified during the survey of 339 villages in South 24 Paraganas.

- 87 villages were assessed in Pathar Pratima where 99 water bodies were found, highest in the district.
- 16 villages were assessed in Budge Budge- II block but only 2 water bodies were found, lowest in the district.

Categorization of the water bodies

Water bodies have been categorized in four groups based on their status: Healthy, Water-Hyacinth, Eutrophication, and Dried-up.

A water body is categorized as **Healthy** if the general appearance is clean and traces/layer of algae is not present in it.

Presence of **Water-hyacinth** is safe for the water bodies until it is present in controlled amount. This plant requires threshing to prevent blockage, so that sunlight could reach the water body bed and it does not become a home for disease-carrying mosquitoes.

A **dried-up** water body indicates that the catchment yield and inlet systems for its replenishment are not active or blocked.

Eutrophication is caused due to presence of excessive nutrients like Phosphorous and Sulphur in water bodies, which can enter through non-point sources of pollution. This leads to increased amount of plant and algal growth, which damages the aquatic life and ecosystem of the water bodies. Water bodies under such condition are on the verge of depletion and requires higher level of intervention.

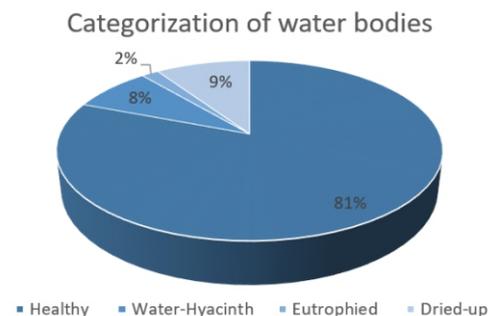


Figure 4.42: Categorization of water bodies in South 24 Paraganas

The study found that 81 per cent of the total water bodies fall under Healthy category. 9 per cent of the water bodies in the district is dried up and 8 per cent had water hyacinth while 2 percent are eutrophied.

Turbidity

Turbidity test was undertaken for 311 water bodies of South 24 Paraganas district, as per the availability of water.

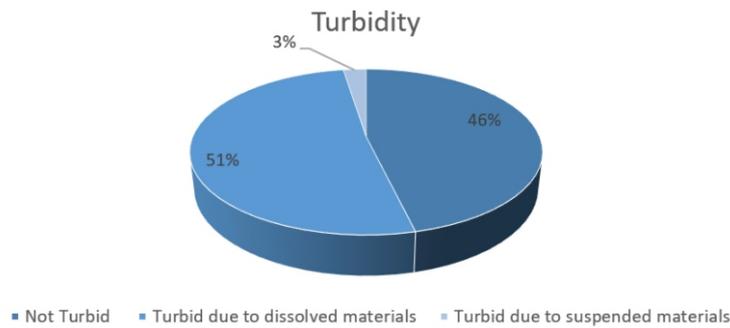


Figure 4.43: Turbidity in water bodies of South 24 Paraganas

As per Figure 4.43, 46 per cent of the water bodies came out to be 'Not Turbid' that denotes clear and transparent water which is good for usage and health of habitat situated nearby.

Settlement near water bodies

Figure 4.44 depicts block-wise 'Percentage distribution of Settlement' found in South 24 Paraganas district. 100% accountability has been captured under 10 blocks with a total count of 350 Water bodies, having settlement present within 200-250 meters of its radius.

Highest percentage of settlements around the water bodies are found in Pathar Pratima (28 per cent) and lowest in Budge Budge-I and Budge Budge-II (1 per cent).

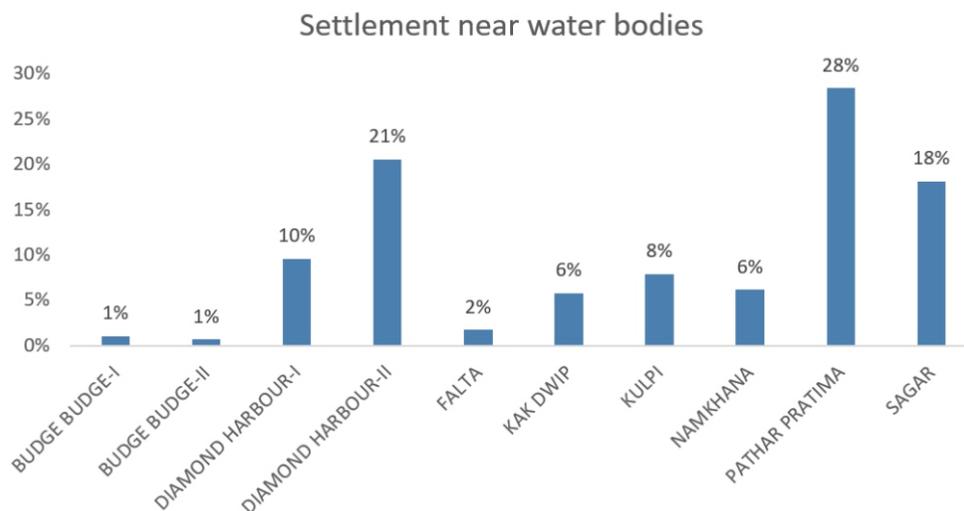


Figure 4.44: Settlement near water bodies in South 24 Paraganas

Figure 4.45 configures two types of settlement, which denotes that Slums/village type of settlement surround 54 per cent of water bodies in the district and Residential type of settlement surrounds 46 per cent of the water bodies.

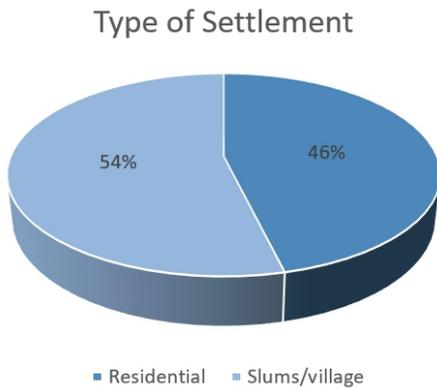


Figure 4.45: Type of Settlement around water bodies in South 24 Paraganas

Type of settlement plays a major role in determining the catchment yield of a water body. Difference in type and load of pollutants was observed through a Slum area and a Residential area. For example: Animal dung, chemical/fertilizers from Slum/village area becomes the cause of pollution in water bodies and on the other hand Solid waste, Silt from under-construction sites in Residential areas are the causes of contamination. However, in exceptional cases the load of pollutants entering into a water body may not vary as per our Project Expert.

Wastewater drainage and Solid waste

Pie-chart, Figure 4.46 represents Wastewater drainage present near water bodies assessed in South 24 Paraganas where 7 per cent of the water bodies get contaminated through wastewater drainage as a cause of direct run-off.

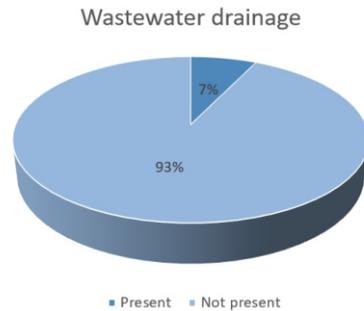


Figure 4.46: Wastewater drainage in and around water bodies in South 24 Paraganas

As per Figure 4.47, it was observed that,

- Pathar Pratima accounts for the highest percentage as 34 per cent of the water bodies had solid waste present in/around them.
- Budge Budge-I accounts 1 per cent of water bodies having solid waste present in/around them.
- No solid waste present in/around the water bodies found in Budge Budge-II.

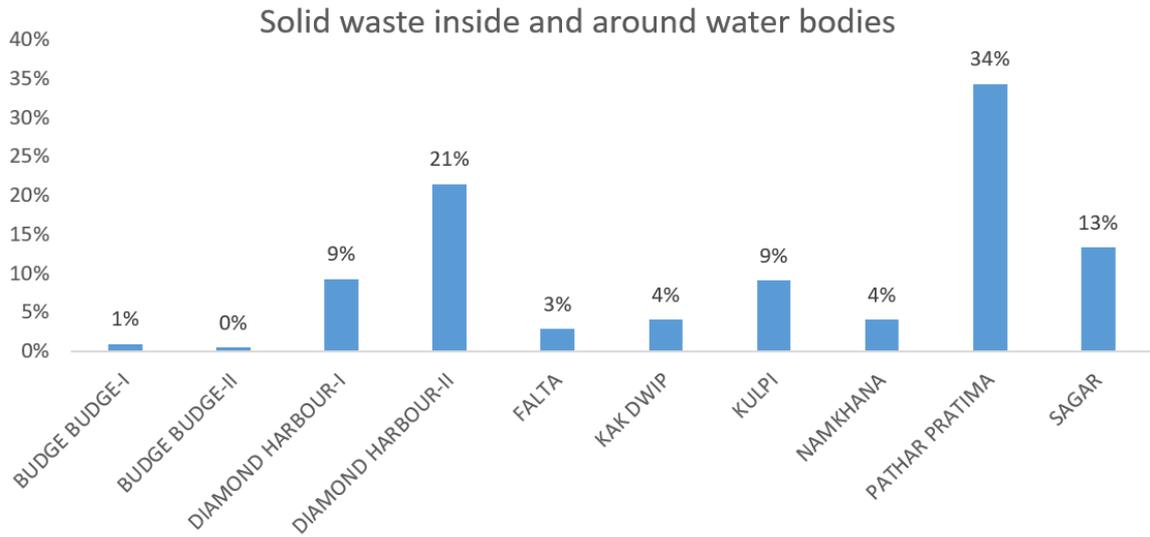


Figure 4.47: Solid waste inside and around water body in South 24 Paraganas

Wastewater drainages present in residential area settlements may cause accumulation of solid waste near and on the surface of water bodies. Screens/mesh/bars restricts solid waste from entering into the water body. However, pollutants which enters the water bodies along with the solid waste and wastewater drainages deteriorate the quality of water present in it. Excessive nutrients like Phosphorus and Sulfur coming from these non-point sources of pollution leads to eutrophication, which damages the overall health of the water bodies.

DISTRICT SCORECARD: South 24 Paraganas

Block-wise scores and Descriptors

Below is a tabular representation of the scores backed by each block of South 24 Paraganas along with its grade and rank.

Rank	Block	Score	Descriptors
1	Kulpi	210.2	Good
2	Kak Dwip	203.0	Good
3	Falta	187.8	Good
4	Namkhana	183.8	Good
5	Budge Budge - I	181.7	Good
6	Budge Budge - II	178.4	Average
7	Diamond Harbour - I	163.0	Average
8	Diamond Harbour - II	161.7	Average
9	Sagar	155.6	Average
10	Pathar Pratima	155.4	Average

Table 11: Ranking of Blocks in South 24 Paraganas based on scores

Graphical representation of block-wise scores of South 24 Paraganas

Scores have been summarized on the basis of all the seven indicators which were considered as the key factors for evaluation of the water bodies out of a total marks of 300.

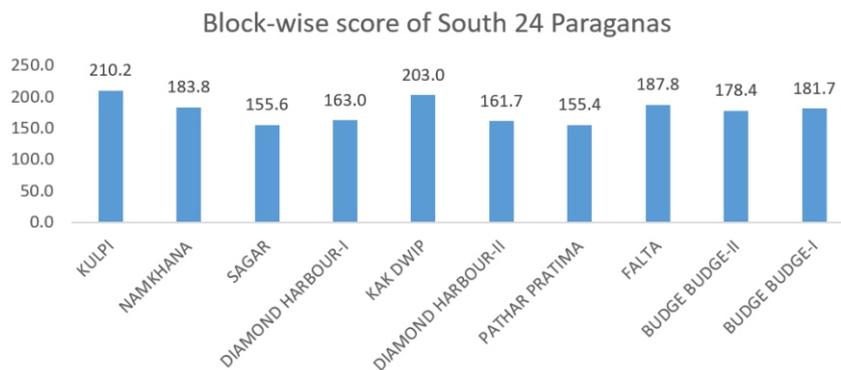


Figure 4.48: Block-wise score of South 24 Paraganas

On the basis of performance, it was found that water bodies present in various blocks of South 24 Paraganas stands with an average score of 182.36.5 out of 300. The resultant score indicates a 'Good' performance by South 24 Paraganas district.

- Kulpi tops the chart among other eight blocks, by obtaining an average score of 210.2 out of 300.
- Lowest score has been attained by Pathar Pratima as 155.4 among the ten blocks.

Indicator-wise scores of South 24 Paraganas

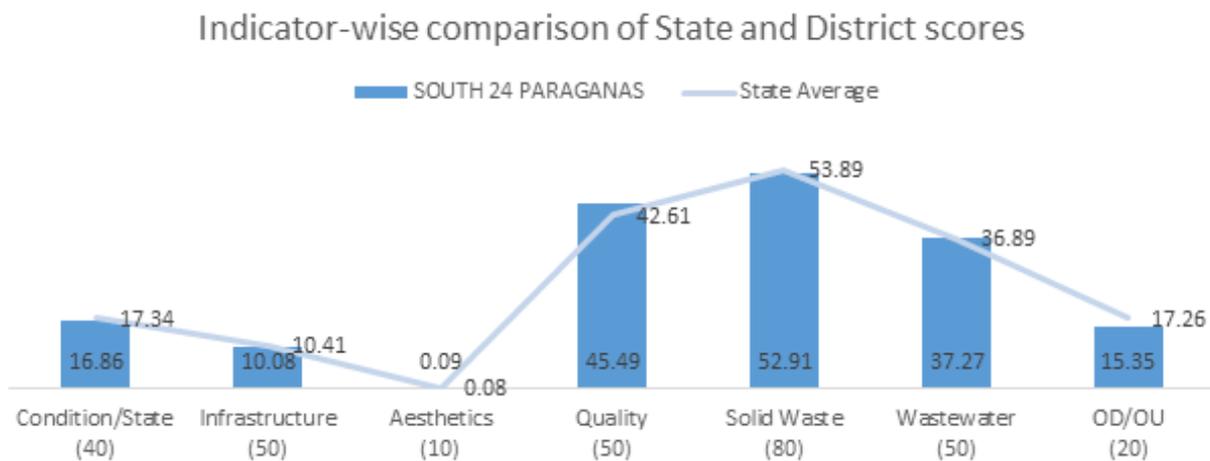


Figure 4.49: Indicator-wise scores of South 24 Paraganas

Above bar graph represents the overall score of South 24 Paraganas district. Evaluation of scores and grades was done on the basis of seven key indicators mentioned below:

- 1. Functionality**, which play a significant role in determining overall health a water body and the reason for its rejuvenation or depletion. Factors affecting the functionality of water bodies are types of settlement and septic tanks present near them.
- 2. Infrastructure** signifies the physical structure of a water body, which includes the condition of fencing, road connectivity around the water body and outlet channel to ensure drain-out of overflow. This indicator plays a vital role in resolving the issue of water bodies being dried-up.
- 3. Aesthetics (Aesthetic enhancement)** includes beautification around the water

bodies, which includes benches, religious architectures, sheds, grass/gardening, etc.

- 4. Quality** as an indicator comprise of factors like turbidity status, eutrophication, and formation of foam, which comprehends the severity in terms of quality of water present in a water body.
- 5. Solid Waste** includes waste present around/on the surface of water bodies. It checks on factors like availability of the dustbins, flies over the Garbage Vulnerable Points (GVPs) and leachate coming out from it, which might directly contaminate a water body.
- 6. Wastewater** includes the status and type of drainage run-off and direct contamination of water body due to it.

7. OD/OU indicator indicates the presence of the human faecal matter, animal dung and urination around water body. It acts as a major role behind the growth of algae and plants into the water body.

The line graphs depicts indicator-wise State average of the survey and the bar graph represents the indicator wise scores of South 24 Paraganas district.

- In terms of Infrastructure and Aesthetics, South 24 Paraganas maintains the mean score corresponding to the State score.
- Whereas, in terms of Quality, and Wastewater drainage, score of South 24 Paraganas is better than the State score.
- However, South 24 Paraganas performed poorer than the State in terms of Condition/State, Solid Waste disposal and OD/OU.

Performance based descriptors of South 24 Paraganas

Cleanliness index of South 24 Paraganas

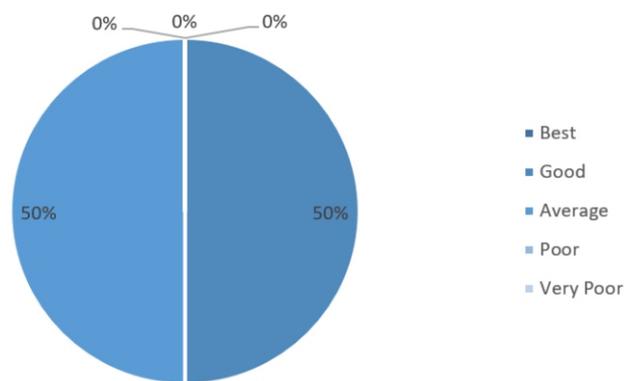


Figure 4.50: Cleanliness index of South 24 Paraganas

Water bodies found in various blocks of South 24 Paraganas were lying under different descriptors as per their performances. These descriptors are characterized by different water body indicators, which denotes water body Cleanliness Index.

'Best' and 'Good' indicates that lower level of intervention is required, whereas, 'Poor' and 'Very Poor' signifies that higher level of intervention is needed for rejuvenation and sustainability of a water body. Furthermore, medium level of intervention is required for water bodies lying under 'Average' category.

As per the figure, 50 per cent of the water bodies fall under 'Good', which requires less of revival and more of sustainability and rest 50 per cent of water bodies lie in the Average band. These require medium level of intervention for rejuvenation.

Images of water bodies in South 24 Paraganas



Healthy
WB_SIBKALINAGAR_335203_020401_W1



Water Hyacinth
WB_CHAR NANDAN BATI_322304_032073_W13



Dried up
WB_ACHINTYA NAGAR_335382_021287_W7



Eutrophied
WB_KRISHNAPUR_Tmp308396_029571_W1



Aesthetic Enhancement
WB_GOBINDAPUR_Tmp308374_029491_W1



Drainage connected
WB_HANSDAHARA_334372_019751_W1



Not turbid
WB_BHADURA_334412_019883_W3



OD
WB_BALIARA_317688_021161_W1




Settlement nearby
WB_KAKDWIP_335236_020441_W1



Turbid due to suspended material
WB_BHAUKOL_334414_019891_W1



Waste around
WB_RUDRANAGAR_316132_022401_W1

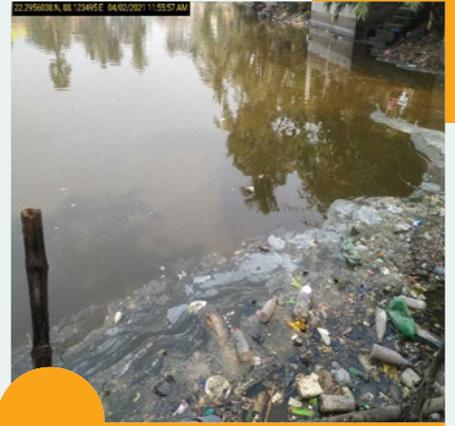

Waste on the surface
WB_SANKARPARULIA_334410_019931_W1

4.1.4.4 District Report: Malda

Configuration

The following bar graph represents the count of water bodies along with the number of villages assessed in a particular block.

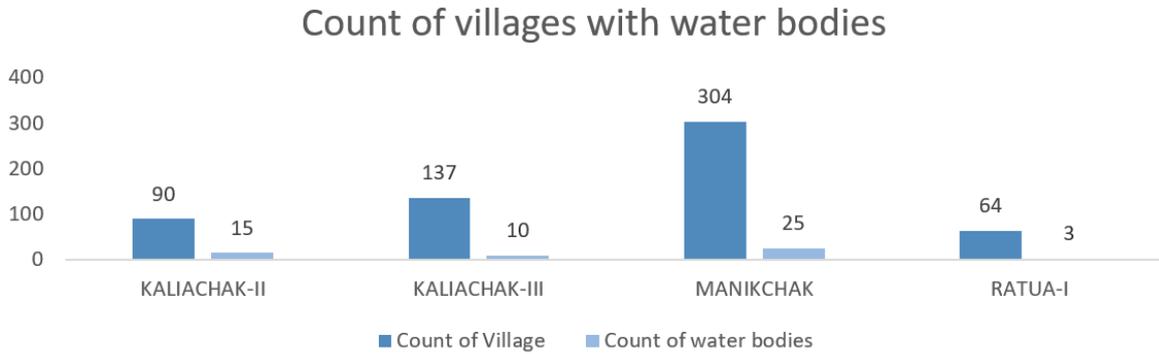


Figure 4.51: Count of villages in Malda with water bodies

Four blocks of Malda district were found to have water bodies within Ganga basin. 53 water bodies were identified during the survey of 595 villages in Malda.

- 304 villages were assessed in Manikchak where 25 water bodies were found.
- 90 villages were assessed in Kaliachak-II had 15 water bodies.
- 10 water bodies were found in 137 villages of Kaliachak-II block.
- Ratua-I block had the least count of water bodies with just 3 water bodies in 64 villages.

Categorization of the water bodies

Water bodies have been categorized in four groups based on their status: Healthy, Water-Hyacinth, Eutrophication, and Dried-up.

A water body is categorized as **Healthy** if the general appearance is clean and traces/layer of algae is not present in it.

Presence of **Water-hyacinth** is safe for the water bodies until it is present in controlled amount. This plant requires threshing to prevent blockage, so that sunlight could

reach the water body bed and it does not become a home for disease-carrying mosquitoes.

A **dried-up** water body indicates that the catchment yield and inlet systems for its replenishment are not active or blocked.

Eutrophication is caused due to presence of excessive nutrients like Phosphorous and Sulphur in water bodies, which can enter through non-point sources of pollution. This leads to increased amount of plant and algal growth, which damages the aquatic life and ecosystem of the water bodies. Water bodies under such condition are on the verge of depletion and requires higher level of intervention.

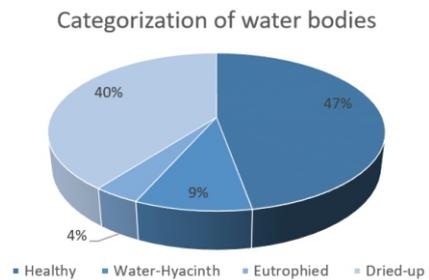


Figure 4.52: Categorization of water bodies in Malda

The study found that 47 per cent of the total water bodies are Healthy while 40 per cent are dried-up. Additionally, 9 per cent of the water bodies had water hyacinth and 4 per cent Eutrophied.

Turbidity

Turbidity test was undertaken for 37 water bodies of Malda district, as per the availability of water.

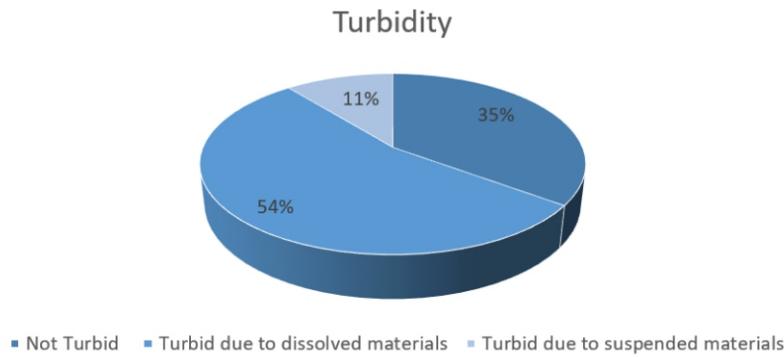


Figure 4.53: Turbidity in water bodies of Malda

Whereas, 11 per cent of the water bodies were found as 'Turbid due to Suspended material' which contains heavy particles of silt and thick traces of algae. Additionally, 54 per cent of them hold their status as 'Turbid due to dissolved material' that contains a major proportion of mud and silt.

Settlement near water bodies

Figure 4.54 depicts block-wise 'Percentage distribution of Settlement' found in Malda district. 100% accountability has been captured under 4 blocks with a total count of 53 Water bodies, having settlement present within 200-250 meters of its radius.

Manikchak has the highest percentage of water bodies that surrounded by settlements whereas, Ratua-I accounts the least.

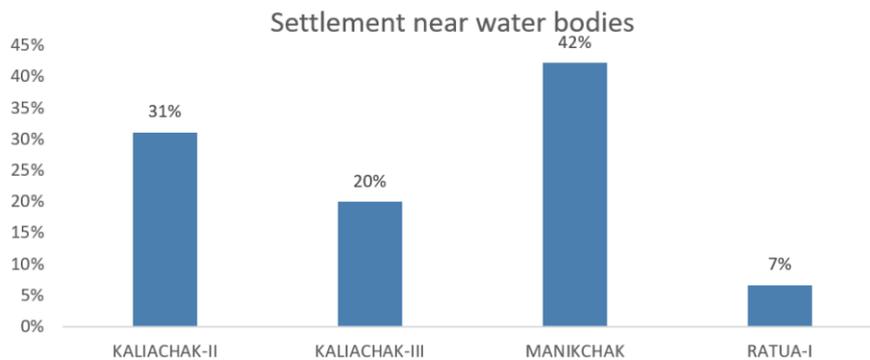


Figure 4.54: Type of Settlement around water bodies in Malda

Figure 4.55 configures two types of settlement, which denotes that Residential type of settlement surrounds 56 per cent of the water bodies whereas Slums/Village type of settlement surround 44 per cent of the water bodies.

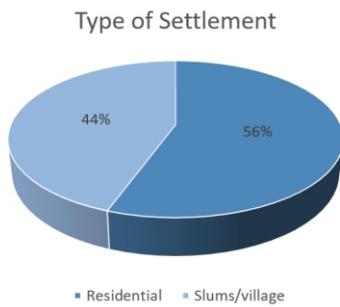


Figure 4.55: Type of Settlement around water bodies in Malda

Type of settlement plays a major role in determining the catchment yield of a water body. Difference in type and load of pollutants was observed through a Slum area and a Residential area. For example: Animal dung, chemical/fertilizers from Slum/village area becomes the cause of pollution in water bodies and on the other hand Solid waste, Silt from under-construction sites in Residential areas are the causes of contamination. However, in exceptional cases the load of pollutants entering into a water body may not vary as per our Project Expert.

Wastewater drainage and Solid waste

Pie-chart, Figure 4.56 represents Wastewater drainage present near water bodies assessed in Malda where 15 per cent of the water bodies get contaminated through wastewater drainage as a cause of direct run-off.

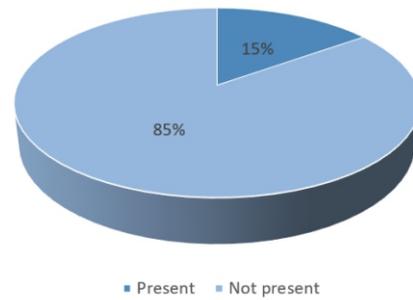


Figure 4.56: Wastewater drainage in and around water bodies in Malda

As per Figure 4.57, it was observed that,

- Manikchak accounts for the highest percentage as 56 per cent of the water bodies had solid waste present in/around them.
- Ratua-I accounts 4 per cent of water bodies having solid waste present in/around them.

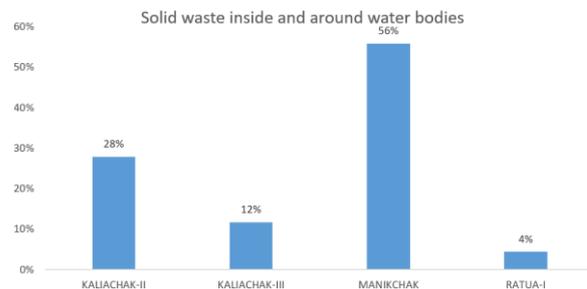


Figure 4.56: Wastewater drainage in and around water bodies in Malda

Wastewater drainages present in residential area settlements may cause accumulation of solid waste near and on the surface of water bodies. Screens/mesh/bars restricts solid waste from entering into the water body. However, pollutants which enters the water bodies along with the solid waste and wastewater drainages deteriorate the quality of water present in it. Excessive nutrients like Phosphorus and Sulfur coming from these non-point sources of pollution leads to eutrophication, which damages the overall health of the water bodies.

DISTRICT SCORECARD: Malda

Block-wise scores and Descriptors

Below is a tabular representation of the scores backed by each block of Malda along with its grade and rank.

Rank	Block	Score	Descriptors
1	Kaliachak - III	187.1	Good
2	Manichak	181.6	Good
3	Kaliachak - II	177.0	Average
4	Ratua - I	154.2	Average

Table 12: Ranking of Blocks in Malda based on scores

Graphical representation of block-wise scores of Malda

Scores have been summarized on the basis of all the seven indicators which were considered as the key factors for evaluation of the water bodies out of a total marks of 300.

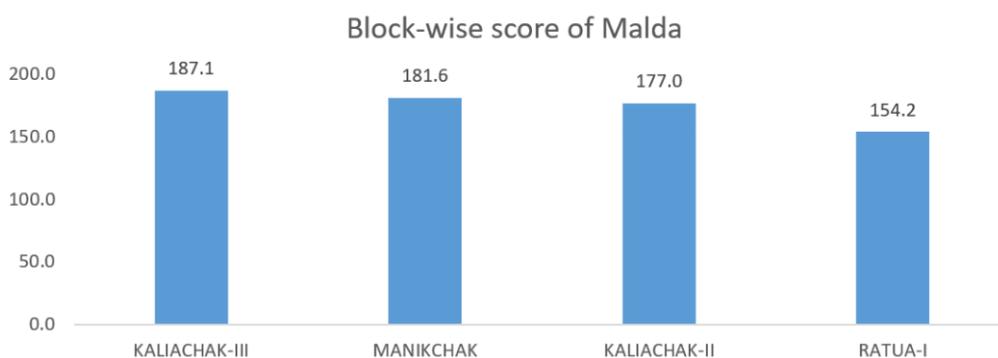


Figure 4.58: Block-wise score of Malda

On the basis of performance, it was found that water bodies present in various blocks of Malda stands with an average score of 174.97 out of 300. The resultant score indicates a 'Average' performance by Malda district.

- Kaliachak-II tops the chart among the four blocks, by obtaining an average score of 187.1 out of 300.
- Lowest score has been attained by Ratua-I with the score of 154.2 among the four blocks.

Indicator-wise scores of Malda

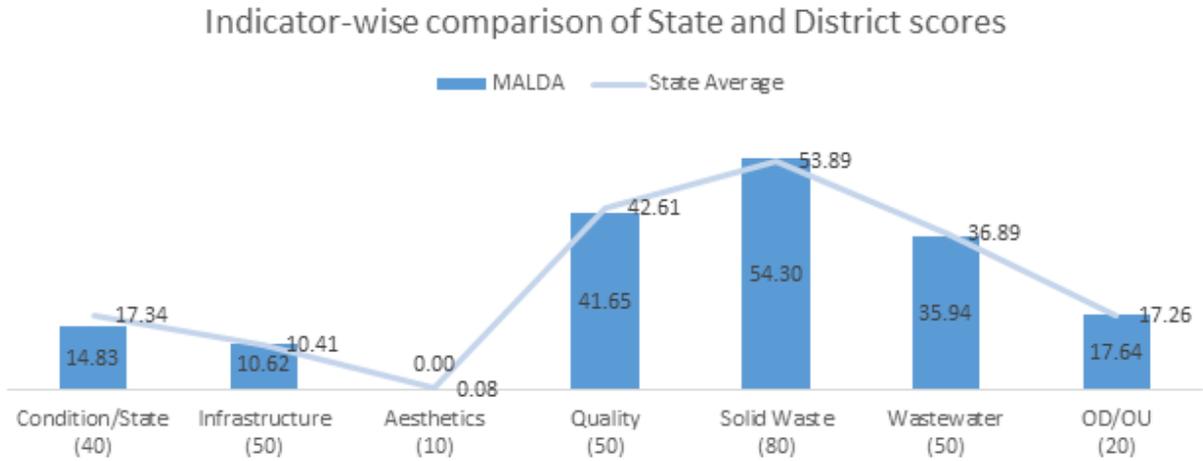


Figure 4.59: Indicator-wise scores of Malda

Above bar graph represents the overall score of Malda district. Evaluation of scores and grades was done on the basis of seven key indicators mentioned below:

- 1. Functionality**, which play a significant role in determining overall health a water body and the reason for its rejuvenation or depletion. Factors affecting the functionality of water bodies are types of settlement and septic tanks present near them.
- 2. Infrastructure** signifies the physical structure of a water body, which includes the condition of fencing, road connectivity around the water body and outlet channel to ensure drain-out of overflow. This indicator plays a vital role in resolving the issue of water bodies being dried-up.
- 3. Aesthetics (Aesthetic enhancement)** includes beautification around the water bodies, which includes benches, religious architectures, sheds, grass/gardening, etc.

- 4. Quality** as an indicator comprise of factors like turbidity status, eutrophication, and formation of foam, which comprehends the severity in terms of quality of water present in a water body.
- 5. Solid Waste** includes waste present around/on the surface of water bodies. It checks on factors like availability of the dustbins, flies over the Garbage Vulnerable Points (GVPs) and leachate coming out from it, which might directly contaminate a water body.
- 6. Wastewater** includes the status and type of drainage run-off and direct contamination of water body due to it.
- 7. OD/OU** indicator indicates the presence of the human faecal matter, animal dung and urination around water body. It acts as a major role behind the growth of algae and plants into the water body.

The line graphs depicts indicator-wise State average of the survey and the bar graph represents the indicator wise scores of Malda district.

- In terms of Aesthetics, Infrastructure, and OD/OU, Malda maintains the mean score corresponding to the State score.
- Whereas, in terms of Solid waste disposal, score of Malda is better than the State score.
- However, Malda performed poorer than the State in terms of Condition/State, Quality and Wastewater drainage.

Performance based descriptors of Malda

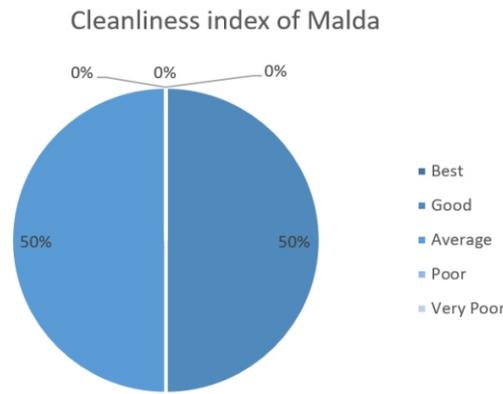


Figure 4.60: Cleanliness index of Malda

Water bodies found in various blocks of Malda were lying under different descriptors as per their performances. These descriptors are characterized by different water body indicators, which denotes water body Cleanliness Index.


'Best' and 'Good' indicates that lower level of intervention is required, whereas, 'Poor' and 'Very Poor' signifies that higher level of intervention is needed for rejuvenation and sustainability of a water body. Furthermore, medium level of intervention is required for water bodies lying under 'Average' category.

As per the figure, 50 per cent of the water bodies fall under 'Good' which requires less of revival and more of sustainability and the other 50 per cent of water bodies lie in the Average band. These require medium level of intervention for rejuvenation.

Images of water bodies in Malda



Healthy
WB_KAMALPUR 2_306651_029291_W1

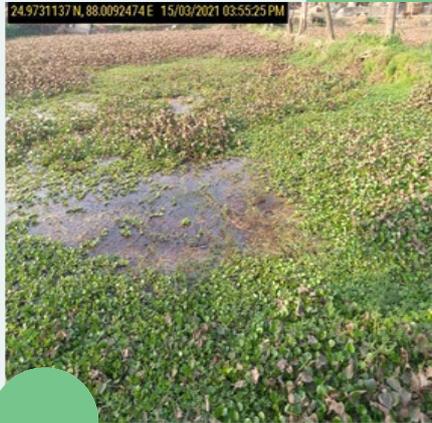

Water Hyacinth | WB
CHOWDHURYTOLA_Tmp512352_022551_W1



Dried up
WB_DULALGANJ_313660_000511_W1



Eutrophied
WB_ALAHITOLA_Tmp512613_024981_W1




Drainage connected
WB_GOBINDAGANJ_Tmp512354_022571_W1



Settlement nearby
WB_JALALPUR 1_309407_029761_W1



Fencing | WB_CHOWDHURYTOLA
Tmp512352_022551_W1

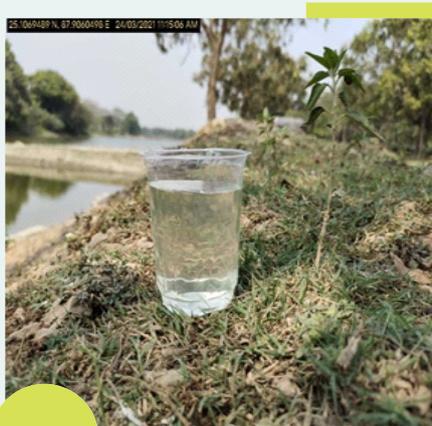


Not turbid
WB_MATHURAPUR_309734_001262_W2



Turbid due to dissolved material
WB_MATHURAPUR_309734_001263_W3



OD
WB_BANKIPUR_313528_001121_W1

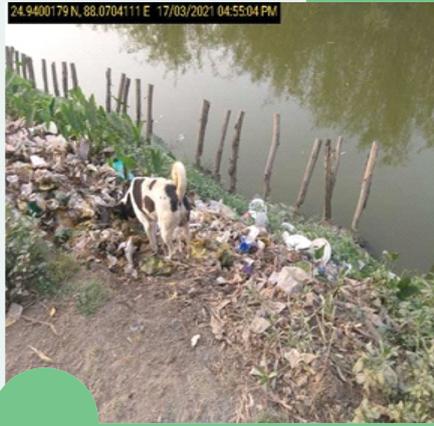

Waste around
WB_DEVIPUR_313673_000501_W1



Waste on the surface
WB_GOBINDAGANJ_Tmp512354_022571_W1

A. ANNEXURE DETAILS

a. Detailed Scoring Toolkit

Category	Sub Category	Question	Options	Updated Marks Breakup	Updated Total Marks
Water Body Index	Condition / State	Does the water body have adequate water (not dried up)?	Yes	10	10
			No	0	
		Does the area around the water body has any settlement?	Yes	0	20
			No	20	
		Do you see any septic tank within 100m of the water body	Yes	If Yes, then following scoring	10
			No	10	
	If yes, How far is the septic tank located?		10-30	0	
			30-50	0	
		50-100	5		
	Infrastructure	Do you see any fencing around the water body	Yes	If Yes, then following scoring	20
			No	0	
		If yes, What is the condition of fencing?	Complete fencing	20	
			Partially fenced	15	
			broken	10	
Is there any Outlet channel in the water body?		Yes	10	10	
		No	0		

Category	Sub Category	Question	Options	Updated Marks Breakup	Updated Total Marks	
		What is the condition of Outlet channel?	Clear	10		
			Partially Blocked	5		
			Blocked	0		
		Is there any road connected or near to the circumference of waterbody?	Yes	0	10	
			No	10		
		Is there a CT/PT near the water body?	Yes	0	5	
			No	5		
		Is the disposal system of the CT/PT connected into water body?	Yes	0	5	
			No	5		
		Aesthetics	Any kind of aesthetic enhancement done around the waterbody?	Yes	If Yes, then following scoring	10
				No	0	
			what kind of aesthetic enhancement do you see around the waterbody	A park	2	
	Just a few benches			2		
	Floral beautification			2		
	A footbridge			2		
Religious architecture	2					

Category	Sub Category	Question	Options	Updated Marks Breakup	Updated Total Marks
	Quality	Turbidity of the water	Turbid due to suspended materials	5	10
			Turbid due to dissolved materials	0	
			Not turbid	10	
		Is the water body Eutrophied?	Yes	0	20
			No	20	
		What type of Eutrophication in the water body?	Traces of Algal blooms in the water body	10	20
			A thin layer of Algal blooms	5	
			A thick green layer of Algal bloom and slime (blocking sunlight)	0	
		Do you see any foam on the surface of the water body	Yes	0	20
			No	20	
		If Yes, what is the volume of foam?	Foam present at only one checkpoint	10	20
			Foam present at two checkpoints	6.7	
			Foam present at three checkpoints	3.3	
			Foam present at all checkpoints	0	


Category	Sub Category	Question	Options	Updated Marks Breakup	Updated Total Marks	
	Solid Waste	Do you see any kind of waste around the water body?	Yes	0	20	
			No	20		
		If Yes	Present around only one checkpoint	10		
			Present around two checkpoints	6.7		
			Present around three checkpoints	3.3		
			Present around all checkpoints	0		
		Do you see leachate coming out of the dump	yes	0		20
			no	20		
		If Yes, Is leachate following into the water body?	Yes	0		
			No	10		
		Do you see any dustbins around the waterbody	Yes	10	10	
			No	0		
		Do you see flies around the dump	Yes	0	10	
			No	10		
		Do you see any waste on the surface of the water body?	Yes	0	20	
			No	20		

Category	Sub Category	Question	Options	Updated Marks Breakup	Updated Total Marks	
		If yes	Present at only one checkpoint	10		
			Present at two checkpoints	6.7		
			Present at three checkpoints	3.3		
			Present at all checkpoints	0		
	Wastewater	Does any kind of washing take place (50m) around the water body?	Yes	0	20	
			No	20		
		Do you see any kind of wastewater drain	Yes	If Yes, then following	30	
			No	30		
		If yes	Drainage into the waterbody	0		
			Drainage around the waterbody	10		
		Do you see screen mesh/grill/net at the opening of the drainage	Yes	10		
			No	0		
	OD/OU	Do you see any human faecal matter or animal dung around the waterbody	Yes	0		20
			No	20		
		If yes	Present around only one checkpoint	10		
			Present around two checkpoints	6.7		
Present around three checkpoints			3.3			
Present around all checkpoints			0			

b. Standard operating Procedure: Aerial Survey of water bodies

**STANDARD OPERATING PROCEDURE
FOR DRONE ASSESSMENT (AERIAL SURVEY)**

QUALITY COUNCIL OF INDIA	Date:	10th March 2021
	Document Number:	QCI-SOP-DS-0002
	Version:	2.0
STANDARD OPERATING PROCEDURE FOR AERIAL SURVEY OF WATER BODIES USING DRONES	Prepared By:	
	Reviewed By:	
	Approved By:	
	Authorized signatory:	

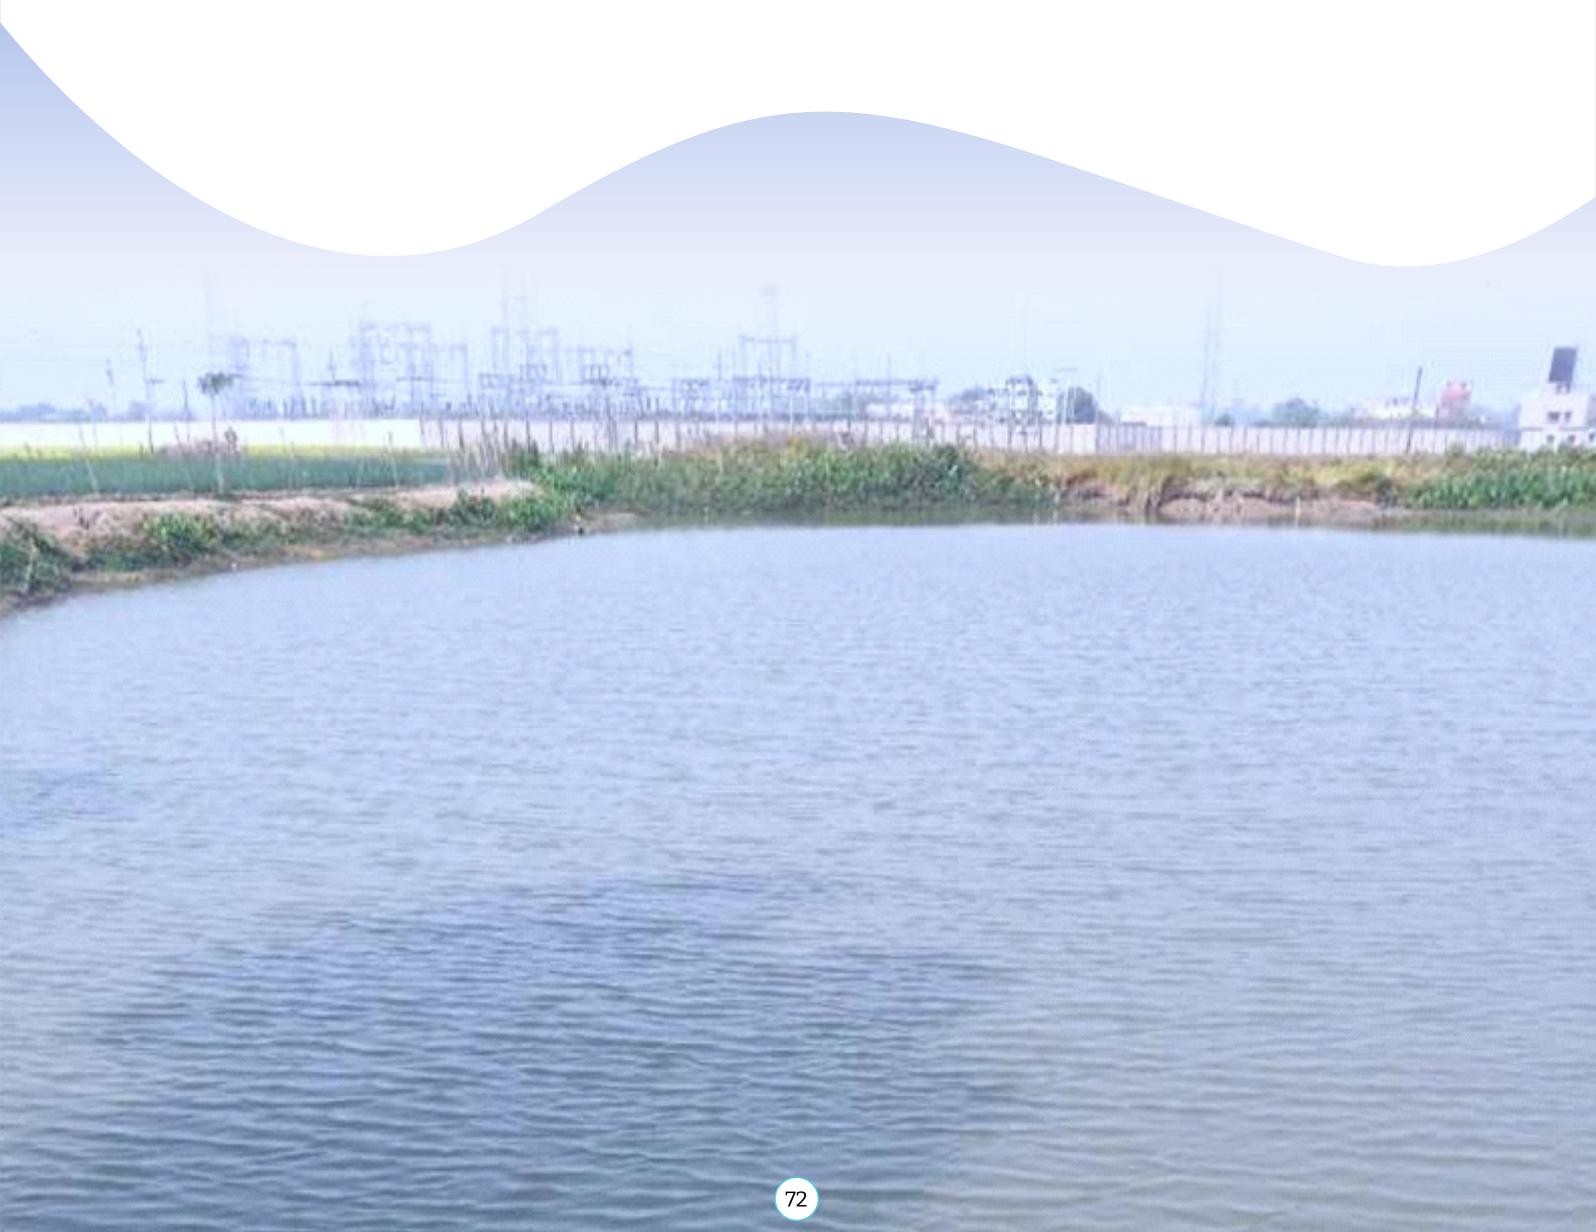

1. Objective

1.1 General

A drone survey refers to the use of a drone, or unmanned aerial vehicle (UAV), to capture aerial data with downward-facing sensors. During a drone survey with an RGB camera, the water body is photographed several times from different angles, and each image is tagged with coordinates. This report presents the technical information about the survey aspects of the project located in India.

1.2 Scope of Work

The objectives of the drone survey are as follows:


- Data acquisition
- Data processing
- Topo drawing (Contour Mapping)
- Area of the water body

1.3 Methodology

The methodology adopted for the drone survey is data acquisition using drone to get data in the form of images will be acquired by the drone.

Check points are laid to improve the accuracy of the dataset. Photogrammetry combines images that contain the same point on the ground from multiple vantage points to yield detailed 2D and 3D maps.

2. Process flow

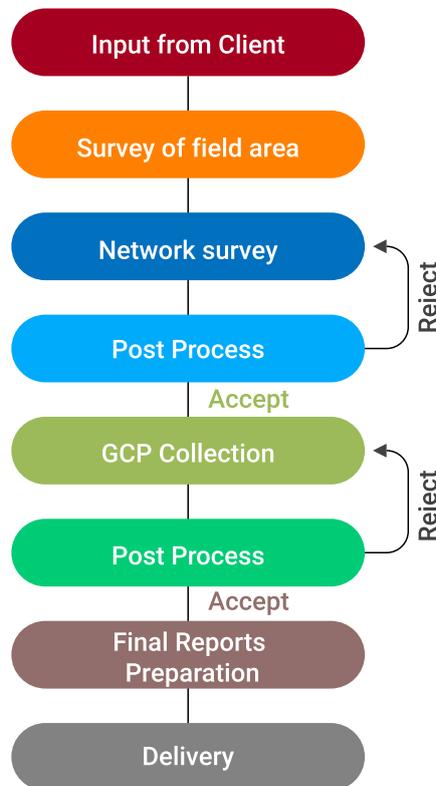


2.1 Drone Survey


Most of the photogrammetry and LiDAR surveys requires a lot of Ground Control Points (GCPs) to georeferenced the

data accurately. But with the GNSS PPK (Post Processing Kinematics) technology which is very scientifically integrated with the Skylark's UAS platforms, the need of Ground Control Points (GCPs) is reduced by 90% and the rest of the 10% of the GCPs will be used to transform the geographical coordinate system to another reference plane and for ensuring the accuracy levels. Every time an image is captured, the system provides very high precision camera position. This provides a whole trajectory of the image capturing coordinates of the camera, which can be used at real time or during the post processing time. The system requires two units, one of the units is base station and other is called as rover, which in this case will be UAS. The base station and rover will be continuously connected with each other as well with the GPS and GLONASS satellites. PPK provides centimeter level accuracy. Eventually, with PPK system following advantages can be observed when compared to very conventional method of just using Ground Control Points (GCPs) to obtain accuracy:

1. Better absolute accuracy (5-7 cm in X, Y and 8-10 cm in Z) wherein only using GCPs limits the accuracy in Z to 15-20 cm
2. Lower number of GCPs (only 3-4) whereas avg. 7-8 GCPs are required per 100 Hectare when PPK is not used.
3. Consistent accuracy throughout the area whereas in case of only GCP approach, accuracies (10-12cm) are concentrated around the GCPs and deviates in areas away from GCPs
4. Lower processing time as PPK geo-tag enables faster alignment of images and does not rely only on image feature identification-based alignment which consumes multiple times higher time.

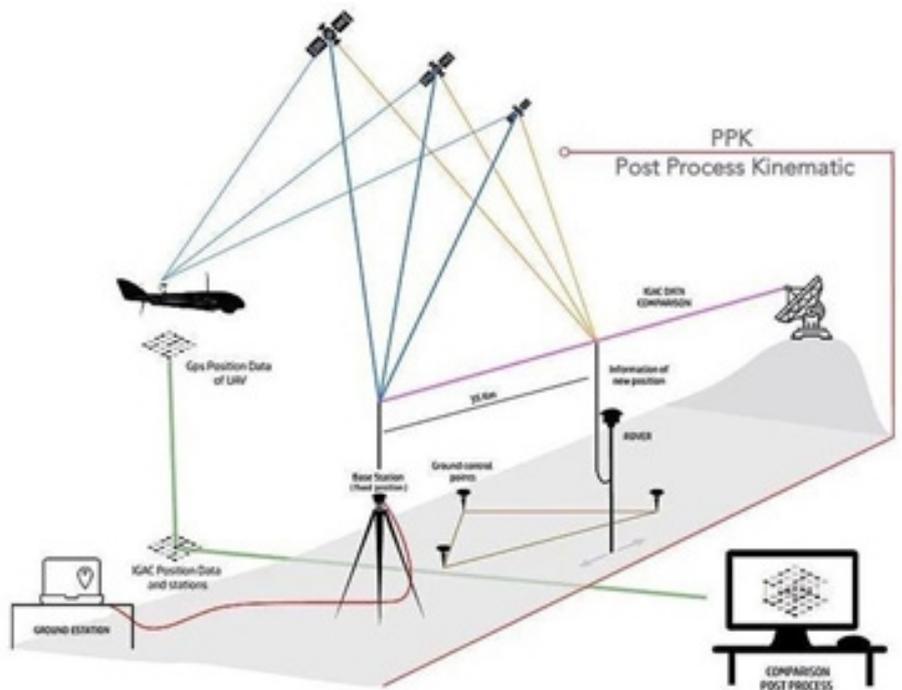

Process Flow

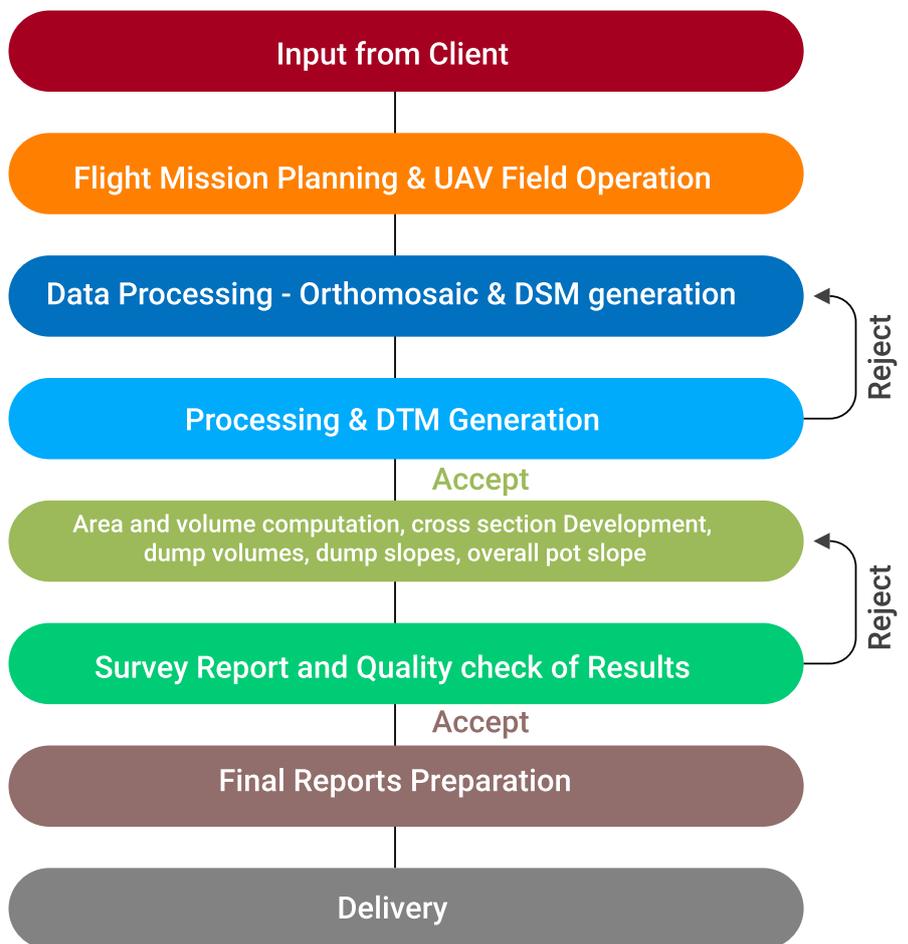

2.2 Accuracies achieved in Photogrammetry

In photogrammetry, accuracy depends majorly on the following factors:

- Scientific practices (GCP placement, Path planning etc.,)
- Image resolution
- Image position accuracy
- Flying conditions
- Ground Control Point accuracy
- Data processing practices

Unlike manned aircraft, which cannot fly at low altitudes, UASs can provide fantastic image resolutions even with simple digital camera. If all the above factors are carefully tackled, the accuracies can be as good as 3-4 cm in in X, Y plane and 5-6 cm in Z plane using the photogrammetry technique. To achieve these accuracies, we at Skylark follow extremely scientific methods which include extensive new age research and methodologies of our own. A lot of on-board UAS sensor data (viz., attitude, location, state etc.,) are continuously stitched with images to obtain survey grade results and accuracies.

PPK Technology Vs Ground Control


Parameter	Non PPK Drone	PPK Enabled Drone	Advantage
X, Y and Z Absolute Accuracies without GCP's	>50 cm	7-9 cm in X and Y, 12-15 cm in Z	Better accuracies without GCP's
Best Accuracies with GCP's	5-10 cm in X and Y, 10-15 in Z	3-4 cm in X and Y, 7-8 cm in Z	Up to 2times better accuracies with GCP's
Number of GCP's per Sq. Km for above accuracies	8-10	1-2	Less dependency on other factors and more area coverage per day
Relative Accuracies	Higher Accuracy near the GCP, Accuracy decreases as we move farther	Accuracies remain same through the data irrespective of GCP's	For large areas PPK is more useful than any other technology

Table: Comparison of accuracy and GCP requirements for PPK and Non-PPK drone



2.3 The Typical UAV Workflow

A typical survey workflow for photogrammetry using a Drone/UAS appears following:

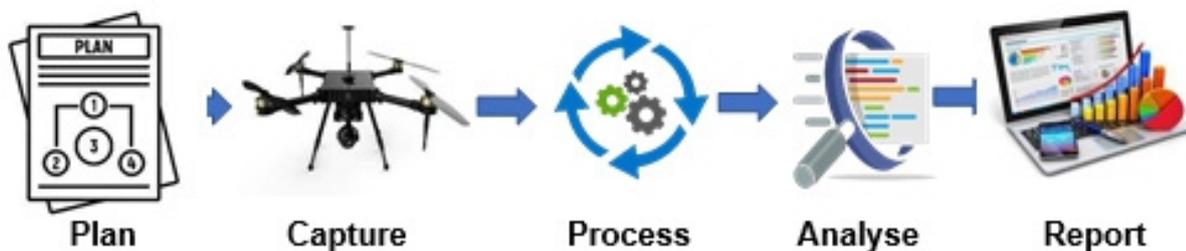

2.4 Preflight Checklist

Pre-Flight Checklist	Version	Revision
Project Code	Date	Client
PM/TL/PIL/GCS	Mission Id	UAV ID
Parameter	Checklist/Value	Remarks
UAV Preparation		
Landing time		
Disarm UAV by push safety button switch		
Plug out the battery		
Turn off the RC Transmitter		
Disconnect Mission Planner from drone		
Launcher Preparation		
Distance travelled		
Flight time		
Battery ID		
Camera Battery ID		
Battery Preparation		
Weather condition		
Temperature	%	
Altitude	V	
Wind Speed	V	
Camera Preparation		
Camera ID		
Camera Battery ID		
Camera SD Card ID		
Camera condition is good, and setting is adjusted		
Battery camera level > 50%	%	
Memory card is empty and inserted		
Lens and UV filter are cleaned properly		

Camera active gimbal structure is good		
Camera is installed on UAV and connected to the system		
GCS Preparation		
Computer Battery is sufficient >50%	%	
Modem is positioned properly		
Mission planner software is working properly		
Flight Mission		
Waypoints position and height are correct		
Mission length <70 km	km	
Mission altitude > 200 m	m	
Final Preparation		
Turn on UAV by plug in battery		
Mission Planner is connected with telemetry signal > 90%		
Current mission uploaded		
Set camera mount to "Neutral" mode		
Camera trigger system is checked		
MP Battery percentage indicator >95%	%	
MP Battery voltage indicator >16.5 v	V	
GPS satellite count >7 sat	sat	
HDOP value is sufficient <2.0		
IMU indicator is good		
UAV is mounted to the launcher with roll orientation to launcher <2°		
UAV mount no-slip at 100% throttle and rotary direction is checked		
All servos respond to roll, pitch and deflection is checked		
UAV's mode "FBW-A"		
Take-off direction adjusted to headwind		
Take-off time		
Condition		
Weather condition		
Temperature	°C	
Humidity	%	
Pressure	mmHg	
Altitude	m	
Wind Speed	m/s	
Wind Direction	°	
UAV Condition		
Additional Remark and Illustrations		

2.4 Preflight Checklist

Pre-Flight Checklist	Version	Revision
Project Code	Date	Client
PM/TL/PIL/GCS	Mission Id	UAV ID
Parameter	Checklist/Value	Remarks
Recovery and Preparation		
Landing time	:	
Disarm UAV by push safety button switch		
Plug out the battery		
Turn off the RC Transmitter		
Disconnect Mission Planner from drone		
Release the camera from housing		
Copy all the photos to GCS		
Parameters		
DAN/OAN		
Distance travelled	km	
Flight time	min	
Battery ID		
Camera Battery ID		
Camera Battery percentage	%	
Camera SD Card ID		
Number of photos		
Condition		
Weather condition		
Temperature	°C	
Altitude	m	
Wind Speed	m/s	
Wind Direction	°	
UAV Condition		
TL:	GCS:	REMARKS:

2 Procedure

3.1 Data Acquisition Using Drone

3.1.1 General

To obtain good images suitable for processing, it is very important to design a data acquisition plan considering: type of project (aerial, terrestrial, mixed), type of terrain / object, type of camera, purpose of the project, image rate that the images are taken, distance (flight height) at which the images are taken and with which angle to take the images, path(s) to follow to take the images, etc.

For aerial projects, this also implies selecting corridor path or regular grid and/or circular grid, deciding whether terrestrial images will be used, if more than one flights are needed to cover the full area.

3.1.2 Mission Planning

A data acquisition plan is made specific to the site that needs to be surveyed. It depends on the type of terrain / object to be reconstructed. Flight polygons are designed, and data acquired is as per this plan. The flying altitude is designed to capture resolution which best fits the project.

Table 1: Details of Mission Plan

Parameters	Details
Drone Phantom	4 RTK
Flying Altitude	50 - 100 m
Ground Sampling Distance	1.0 - 2.0 cm
Overlap (%)	70/70
Data type	RGB images

Planning involves fixing AOI, placing GCP's across the AOI, and fixing the flight parameters such as Ground Sampling Distance (GSD) or spatial resolution, Frontal overlap, Side overlaps according to project requirements.



Figure: Drone AOI with GCP placement

3.1.3 Check Points Planning

Check Points (CP) are markers laid on the ground which will be incorporated in the photogrammetry processing to improve the accuracy of the dataset. Distance between them is obtained with traditional surveying methods in the field. CPs are necessary for orientation and placement of aerial photographs in the spatial coordinate system.

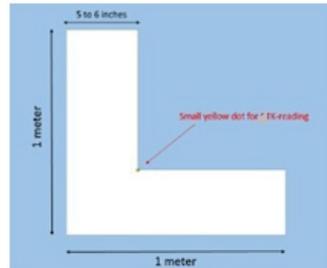


Figure: Sample GCP, placement on ground and taking reading on it

3.1.4 Field Data Collection:

DGPS Survey:

Data Collection involves preliminary reconnaissance survey around the AOI for placing GCP's. Once the GCP's were placed DGPS survey will be conducted to observe the placed GCP's.

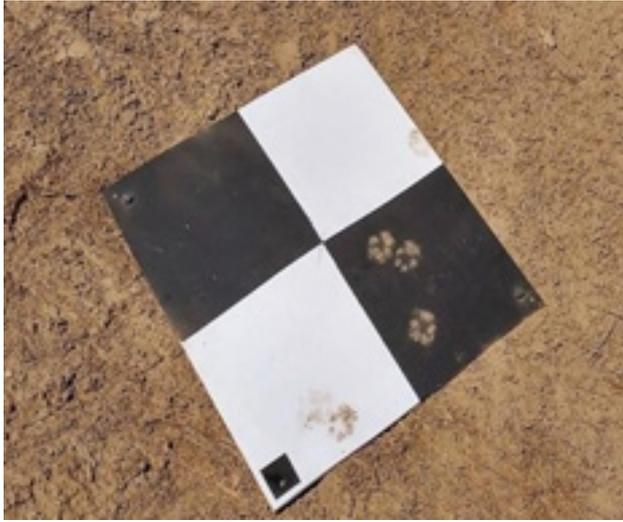


Figure: GCP Banner from Field Survey

3.1.5 Drone Data Collection:

Base will be established to collect drone data. Drone will be flown from the ground station. Following our AOI kml in a Grid in mission planner software.

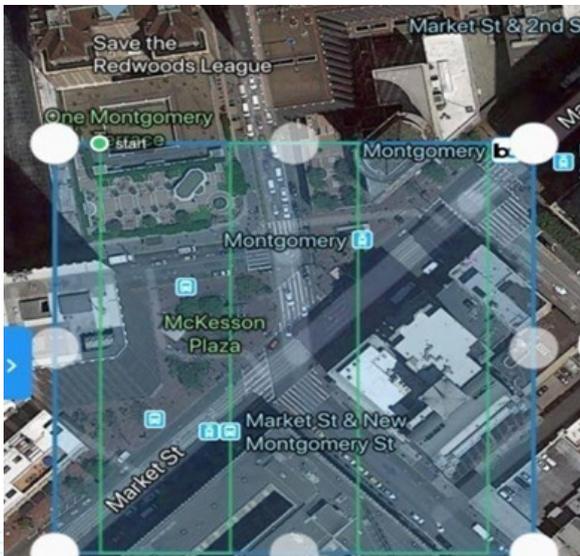


Figure: Drone Planning in Drone Deploy

Key points to consider and keep in mind during field survey

- a. Ensure that permission letters are handy and printouts available in person
- b. Be aware of the surroundings
- c. Fly as per DGCA guidelines to ensure safety
- d. Make sure the operator has the right PPE kit
- e. Always keep an eye on the drone
- f. Keep people a safe distance away from drone take-off and landing site. Once it lands, image data and rover will be downloaded to the computer.

4. Data Processing

4.1. General

The data acquired from the drone survey and the DGPS survey is processed using the technique called Digital Photogrammetry. Entire drone data is stitched together to produce quality output of the site. All the outputs can be viewed/downloaded from the vendor data platform.

4.1.1 Initial Processing

Using Photogrammetry software, the tie points and key points have been extracted in the initial processing by Aerial triangulation and Bundle block adjustment techniques.

4.1.2 Aerial triangulation

It is the process of piecing together the block of overlapping aerial images in an objective to determine the position and orientation of each image in the mapping frame.

4.2. Aligning Cameras

Each drone image has a collection of unique features which differentiate it from other images. These are known as key points. Key points from each image are extracted using automatic computer vision algorithms. Extracted features are then searched (in the nearby images) and matching is performed. Using GPS data to search relevant images makes the matching process much faster and accurate. From matched features, fundamental matrix is derived and the relative position between two cameras is estimated. Relative position estimated from the fundamental matrix is generally prone to errors. Bundle block adjustment is used to simultaneously refine the 3D coordinates (Latitude, Longitude, Elevation), orientation parameters (Yaw, Pitch, Roll), and the optical characteristics (distortion parameters) of the camera(s) employed to acquire the images. Bundle block adjustment is a nonlinear iterative optimization process where the objective function is Mean Re-projection Error (MRE) and parameters are the position, orientation and camera distortion coefficients.

4.2.1. Interior Orientation:

It is the transformation of 2D image coordinate system to 3D Camera coordinate system. Parameters of interior orientation come from camera calibration such as lens distortion, principal point, fiducial marks and focal length etc.

4.2.2. Exterior Orientation:

Exterior orientation is establishing relationships between ground and images based on the six parameters (The position of the camera (X,Y,Z) and orientation of the camera (Omega,Phi,Kappa).

4.2.3 Absolute orientation:

Stereo model that was measured from relatively oriented images is transformed into the ground coordinate system.

4.2.4 Tie Point:

A point in a digital image or aerial photograph that represents the same location in an adjacent image or aerial photograph. Tie-points are needed to link images in

relative orientation of bundle block adjustment.

4.3. Densing To Build Point Cloud

Depth value is estimated for every pixel in the image using Multi-View Stereo algorithms. Individual depth map of an image is fused together with the depth map of the neighboring image to obtain a 3D point. These points are often called as the dense point cloud. It may even consist of greater than 1 crore points for a relatively smaller area. 3D points are triangulated to create Digital Elevation Model (Raster). Every pixel in raster has latitude, longitude and elevation information. Interpolation technique like IDW is used to do 3D point cloud to obtain the elevation model.

4.4 Orthomosaic & Digital Elevation Models

A digital elevation model (DEM) is a 3D representation of a terrain created from its elevation data. A digital surface model (DSM) represents the earth's surface and includes all objects on it. The digital terrain model (DTM) represents the bare ground surface without any objects like plants and buildings.

5. Drone Survey Outputs

5.1. General

The major outputs from photogrammetry processing include Orthomosaic for visual representation, Digital Surface Model and Digital Terrain Model for elevation values throughout the site.

5.2. Digital Surface Model

A digital surface model (DSM) represents the earth's surface and includes all objects on it. The DSM is generated using the densified 3D point cloud. Software which you can use to visualise this data: QGIS.

5.3. Orthomosaic

Orthomosaic can be used to measure true distances, because it is an accurate representation of the Earth's surface, having been adjusted for topographic relief, lens distortion, and camera tilt. Orthorectification step involves creating a visibility or occlusion map with respect to each image. The orthomosaic is generated based on the DSM. Software which you can use to visualise this data: QGIS.

The raster DSM (using Interpolation techniques such as IDW, Triangulation based on the terrain surface) and Ortho-mosaic from the obtained point cloud has been

generated. The resolution of outputs depend on the GSD which further decreased to higher resolution using GIS software.

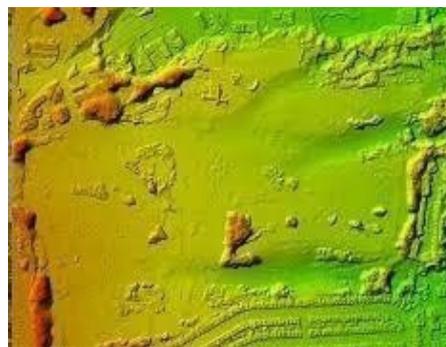


Figure: Ortho and DSM processed from software

5.4. Digital Terrain Model

The digital terrain model (DTM) represents the bare ground surface without any objects like plants and buildings. The DSM is further processed to remove vegetation and buildings in order to create a DTM. Software which you can use to visualise this data: QGIS.

5.5. Point Cloud

Point clouds are a collection of points that represent a 3D shape or feature. Each point has its own set of X, Y and Z coordinates. The Point cloud will be generated from extracted Tie Points at point

density of 30-50 points per sq.m. Point cloud density can be varied based on the GSD and processing setup.



Figure: Point Cloud processed from Images

5.6 Topographic Drawing

From the photogrammetry outputs, the topography of the site is represented as a drawing. This drawing includes quantitative representation of terrain using contours and spot levels. Apart from these, it also represents both natural and man-made features on the site. Software which you can use to visualise this data: AutoCAD.

Point clouds, Orthomosaic can be further processed to extract digitised boundary layers, contours, Digital Terrain Model etc.

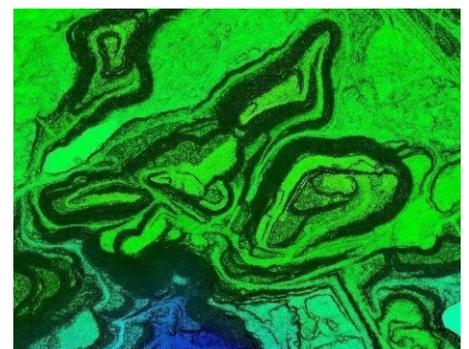


Figure: DTM cleaned and extracted from Point cloud

Software suites currently used after data acquisition are as follows:

1. Pix4D: Image processing to generate 2d Orthomosaic and 3d Point clouds
2. Bentley Microstation: Point Cloud Classification, DTM Generation
3. Global Mapper: ECW conversion, Image Tiling, cropping etc. Quality checks, 3DAnalytics, Digitization
4. ArcGIS: Digitization, Image Tiling
5. AutoCAD Civil/Map3d: Digitization, Volumetric analysis

6. Annexure

6.1. Permits

Before starting the aerial survey, permits are required from District Magistrates in coordination with the concerned ministries. District Magistrate enforces the orders received from ministries to the SP after which SP informs the local police stations and the concerned government officials under his jurisdiction and parallelly District Magistrate informs the same to their Block Development Officer under his jurisdiction.

6.2 Safety Hazards

Before starting the aerial survey, we shall identify operational drone safety hazards separated into “active failures” and “latent conditions”, both of which occur or might occur

during the flight operations.

1. Loss of control
2. Loss of transmission
3. Collision with buildings, power lines, structures etc.
4. Partial failure or loss of navigation systems
5. Severe weather or climatic events
6. Take-off and landing incidents as undershooting or overrunning

6.3. Points to be considered

The following must be kept into consideration before deploying the team for aerial survey


1. Travelling in extremely rural areas can be a challenge as the pilot has to go off- road to reach the exact waterbody location.
2. There should be a team of 2 members pilot and a co-pilot with at least one of them fluent with the local language which will help them to communicate with the locals, find out the exact water body and seek help in case of any emergencies.
3. Raw Data Collected by drone is heavy and transferring the same to the data processing team can be a challenge due to poor internet connectivity in the Rural Areas.
4. As drone equipment is bulky, drone operator is required to travel with four-wheel vehicle.

6.3. Points to be considered

Photogrammetry Outputs	Data Provided	
1	Orthomosaic Model Map	Yes/No
2	Digital Surface Model Map	Yes/No
3	Digital terrain Model Map	Yes/No
Topographic Drawings	Data Provided	
1	Topographic Drawing	Yes/No
2	Contour Map	Yes/No
Survey Outcomes	Data Provided	
1	Analysis of Site (Waterbody Area)	Yes/No
2	Feature Map of Waterbody	Yes/No
3	Farmland Details	Yes/No
4	Trees Details	Yes/No



नमामि
गङ्गा

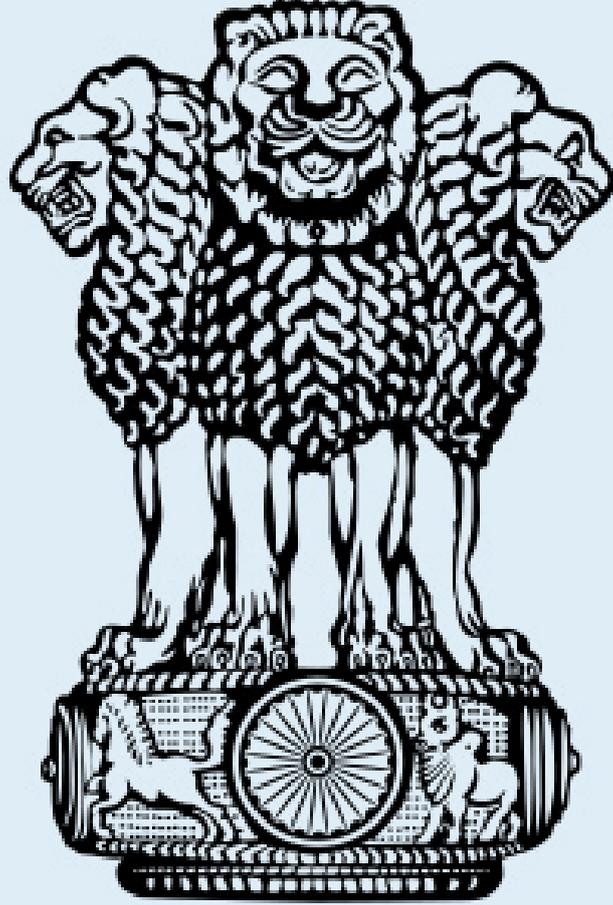

सत्यमेव जयते

National Mission for Clean Ganga

(Registered Society, Under Act 1860)

Ministry of Jal Shakti

Department of Water Resources, River Development & Ganga Rejuvenation
Government of India